



Marine & Offshore

SOLUTION GUIDE

Edition 1/26,
valid from 08/2026



A Rolls-Royce
solution

A FORCE FOR PROGRESS.

We at Rolls-Royce provide world-class power solutions and complete life-cycle support under our product and solution brand **mtu**. Fully utilizing the potential of digitalization and electrification, we strive to develop climate-neutral drive and power generation solutions that are even cleaner and smarter and thus provide answers to the challenges posed by climate change and the rapidly growing societal demands for energy and mobility. We deliver and service comprehensive, powerful and reliable systems, based on both gas and diesel engines, as well as electrified hybrid systems.

A solution provider

mtu systems power the strongest tugboats, the most modern yachts and the biggest land vehicles and provide energy for the world's most important mission-critical applications. With advanced solutions such as microgrids we integrate renewable energies and manage the power needs of our customers.

For over 110 years we have provided innovative solutions for our customers – meeting even the most demanding drive and power requirements. Our products and services span a wide range of applications and power needs, with both standard and customized options.

An expert in technology

mtu products are known for cutting-edge innovation and technological leadership. That same spirit of innovation inspires our sustainability efforts. Our focus is on developing and implementing system solutions that both maximize efficiency and reduce emissions – which in turn helps to reduce our impact on the environment.

A passionate and reliable partner

We at Rolls-Royce spend every day working together with our customers, to deliver engines, systems and complete life-cycle solutions that best fit their needs. We understand that each application is different and has its own specific demands. Our engineers embrace the challenge of finding the perfect solution for your unique power requirements. Every step of the way – from project planning, through design, delivery and commissioning; to the lifetime care of your equipment – we are dedicated to helping you get the most from your **mtu** investment.



CONTENTS

Selection guideline	06	Emission reduction technologies	58
Marine and offshore	06	SCR solutions	60
Offshore exploration & production	08	The <i>mtu</i> Series 4000 M05	62
Power range	10	Systems solutions	64
Power range marine and offshore	10	System expertise	66
Power range offshore exploration & production	14	Combined propulsion solutions	68
Rating philosophy	16	The <i>mtu</i> Hybrid PropulsionPack	70
Power definition	17	Marine gensets	72
Explanation engine and genset designation	18	Offshore generator sets	74
New product introduction	20	Controlling the power with <i>mtu</i> NautIQ solutions	76
<i>mtu</i> engines and gensets overview	24	<i>mtu</i> NautIQ portfolio	78
<i>mtu</i> Series 2000	26	<i>mtu</i> NautIQ Master Unlimited	80
<i>mtu</i> Series 4000	28	<i>mtu</i> NautIQ Master Advanced	81
<i>mtu</i> Series 1163	32	<i>mtu</i> NautIQ Master Essential	82
<i>mtu</i> Series 8000	33	<i>mtu</i> NautIQ Bridge	84
<i>mtu</i> Series 4000 genset — 50 Hz & 60 Hz	34	<i>mtu</i> NautIQ Foresight	86
Diesel/Gas engines for mechanic propulsion	36	<i>mtu</i> NautIQ Drive	88
Diesel/gas engines for mechanic propulsion	38	<i>mtu</i> NautIQ ePower	92
Engines and gensets for on-board power generation and electric-propulsion — 50 Hz & 60 Hz	44	<i>mtu</i> Augmented Reality technology	94
Engines and gensets for offshore wind and exploration & production	52	Systems solutions offshore exploration & production	
Engines and gensets for offshore power generation — 50 Hz & 60 Hz	54	Redundant controller for fire pump drive systems	96
		<i>mtu</i> Service solutions	98
		Extended coverage	100
		<i>mtu</i> ValueCare Agreements	102
		Digital solutions	104
		Reman/overhaul solutions	108
		Support services	112
		Exhaust emissions	114
		Conversion table	123

Selection guideline

MARINE AND OFFSHORE

Application group >		1A	1B	1D	1DS
Mechanical propulsion engines					
Yacht	Planing			■	■
	Semi planing			■	■
	Small displacement		■	■	■
	Large displ. > 120 ft.	■	■	■	■
Cargo ships & tankers	Inland freighters	■			
	Coastal ships	■			
	Sea-river ships	■			
Passenger ships	Tourist boats	■	■	■	
	Passenger ferries	■	■		
	Cabin cruisers ships	■	■		
RoPax ferries	Double-ended ferries	■	■		
	Fast ferries < 50 m	■	■		
	Fast ferries > 50 m		■		
Tugs & push boats	Tow & push boats	■			
	Harbour tugs		■		
	Coastal tugs	■			
	Escort tugs	■	■		
Offshore vessels & crew boats	Crew boats	■	■	■	
	Offshore supply ves.	■	■		
	Anchor handl. tugs	■	■		
	Pilot boats	■	■	■	
	Trawler (fishing ves.)	■	■		
	Firefighting vessels	■	■	■	
	Rescue vessels	■	■	■	
	Research vess.	■	■	■	
	Dredgers	■	■		
	Cable laying vessels	■			

The guideline above gives a rough overview which application groups can be considered for which type of vessel or business model. To allocate which application group suits your demands best, the intended annual usage and the expected load profile have to be considered.

Application group >		1A	1B	1D	1DS
Mechanical propulsion engines					
Marine naval vessels	Corvettes, Frigates, Destroyers	■	■	■	■
	Fleet support vessels	■	■		
	Mine counter-measure vessels	■	■	■	
	Small patrol crafts		■	■	■
Patrol boats	Offshore patrol vessels	■	■	■	■

Application group >		3A / 3B / 3C	3A / 3B / 3C	selected 1A / 1B
Power generation and diesel-electric propulsion		50 Hz	60 Hz	variable
	On-board powergen	■	■	■
	Diesel-electric propulsion	■	■	■
	Emergency powergen	■	■	

3C is available for selected Offshore applications only.

Selection guideline

OFFSHORE EXPLORATION & PRODUCTION AND OFFSHORE WIND APPLICATIONS

mtu diesel engines for

- Heavy lift vessel
- Diving support vessel
- Pipe-laying vessel
- Cable-laying vessel
- Subsea support vessel
- Well intervention vessel
- Accommodation vessel
- Drill ship
- Offshore wind
- converter station
- Fixed platform
- Tension-leg platform
- Jack-up rig
- Spar-type platform
- Normally unmanned installation (NUI)
- Conductor support system
- Compliant power
- FLNG
- Semi-submersible
- FPSO

mtu diesel engines for

power generation - constant speed

Application group >	3A	3B	3C
Power generation	50/60 Hz	50/60 Hz	50/60 Hz
Power generation	■	■	■
Electric firepump drives		■	■
Electric drilling drives	■	■	

The guideline above gives a rough overview which application groups can be considered for which type of vessel or business model. To allocate which application group suits your demands best, the intended annual usage and the expected load profile have to be considered.




Photo: equinor

Power range

MARINE AND OFFSHORE


Main propulsion:

mtu engine series Engine power in kW

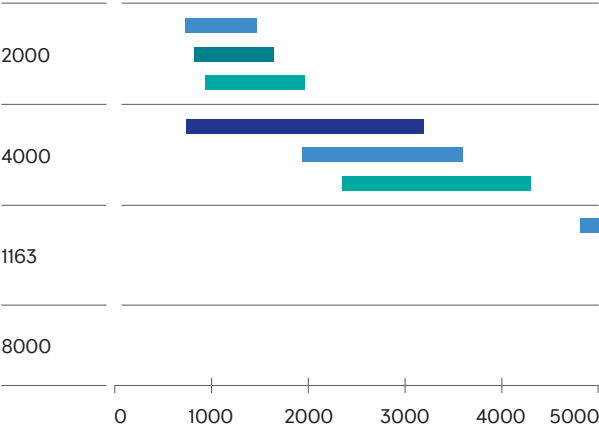

mtu engine power in kW

Engines	1A	1B	1D	1DS
2000	-	720 – 1440	810 – 1630	932 – 1939
4000	746 – 3200	1920 – 3600	-	2340 – 4300
1163	-	4800 – 6000	5200 – 6500	5920 – 7400
8000	-	7280 – 9100	-	8000 – 10000

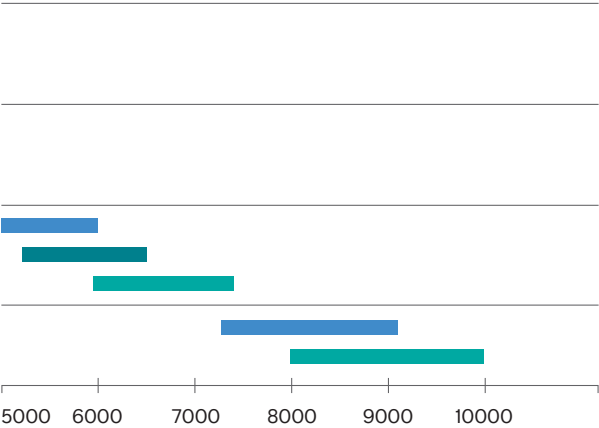



1A	Engines for vessels with unrestricted continuous operation Average load: 70 - 90 % of rated power; Rating definition: ICFN, fuel stop; Typical annual usage: unrestricted*
1B	Engines for fast vessels with high load factors Average load: 60 - 80 % of rated power; Rating definition: ICFN, fuel stop; Typical annual usage: 5000 hours*
1D	Engines for fast vessels with intermittent load factors Average load: ≤ 60 % of rated power; Rating definition: ICFN, fuel stop; Typical annual usage: 3000 hours*
1DS	Engines for fast vessels with low load factors Average load: ≤ 60 % of rated power; Rating definition: ICFN, fuel stop; Typical annual usage: 1500 hours*

* Application groups (page 6-9) only indicate which **mtu** engine suits your demands best. For your type of vessel, you can also choose engines from other application groups than stated in the selection guideline.
Please note: 1A, 1B and 1D ratings are overload capable to 110% (ICXN) for factory acceptance test, but limited to 100% for operation. 1DS ratings are not overload capable at all (exception: 4000 M93).

Power range

MARINE AND OFFSHORE

Marine on-board power generation, diesel-electric drives and generator sets: Fix speed and variable speed gensets

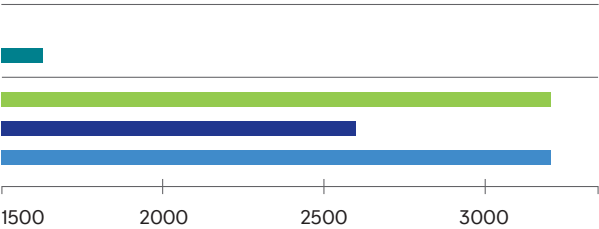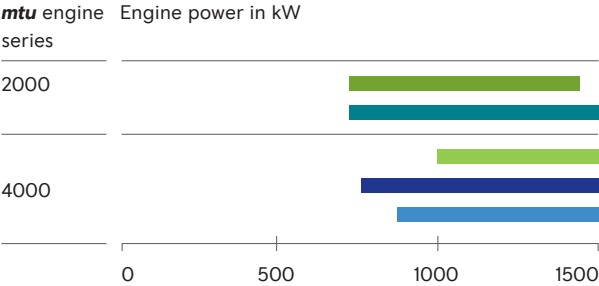

mtu engine power in kW – fix speed

Engines	3A / 3B	3A / 3B
Frequency	50 Hz	60 Hz
4000	760 - 2600	895 - 3200

3A / 3B	Engines for onboard power generation and diesel-electric drive
Continuous operation 50 Hz; Rating definition: ICXN, 10% overload capability	
Continuous operation 60 Hz; Rating definition: ICXN, 10% overload capability	

mtu engine power in kW – variable speed

Engines	1B	1D	1A
Speed range	~ 1200 - 2250 rpm	~ 1200 - 2450 rpm	~ 900 - 1800 rpm
2000	720 - 1440	720 - 1630	
4000			1000 - 3200

1A	Engines for vessels with unrestricted continuous operation
1B	Engines for fast vessels with high load factors
Continuous operation with variable speed / load; Rating definition: ICFN, temporary 10% overload capability for load steps	


Application groups only indicate which **mtu** engine suits your demands best. For your type of vessel, you can also choose engines from other application groups than stated in the selection guideline.

Power range

OFFSHORE WIND,
EXPLORATION & PRODUCTION

Engines and gensets for power generation:

mtu engine Engine power in kW
series

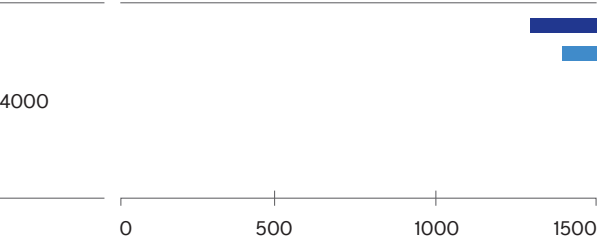

mtu engine power in kW


Engines	3A	3A	3B	3B	3C	3C
Frequency	50 HZ	60 HZ	50 HZ	60 HZ	50 HZ	60 HZ
4000	1350-	1455-	1560-	1680-	1560-	1680-
	2245	2425	2600	2800	2600	2800

mtu genset power in kWe

Gensets	3A	3A	3B	3B	3C	3C
Frequency	50 HZ	60 HZ	50 HZ	60 HZ	50 HZ	60 HZ
PP 4000	1295-	1395-	1500-	1615-	1500-	1615-
	2155	2330	2500	2690	2500	2690


* alternator efficiency of 96% considered, excluding parasitic losses

Application groups (page 6-9) only indicate which **mtu** engine suits your demands best. For your type of vessel, you can also choose engines from other application groups than stated in the selection guideline.

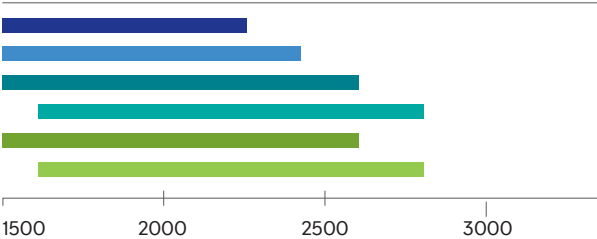

3A / 3B / 3C	Engines for power generation, electric fire-pump drives and emergency power – constant speed
3A	Continuous power
50 Hz	Continuous operation power, unrestricted Rating definition: ICXN, 10% overload capability
60 Hz	Continuous operation power, unrestricted; Rating definition: ICXN, 10% overload capability
3B	Prime power
50 Hz	Continuous operation with variable load Rating definition: ICXN, 10% overload capability
60 Hz	Continuous operation with variable load; Rating definition: ICXN, 10% overload capability
3C	Prime power limited
50 Hz	Standby operation with variable load Rating definition: ICXN, 10% overload capability
60 Hz	Standby operation with variable load Rating definition: ICXN, 10% overload capability

RATING PHILOSOPHY

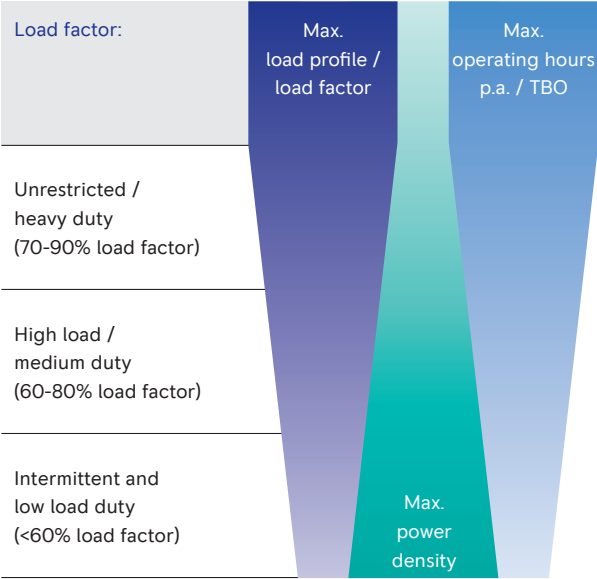

Diagram

We are working hard to meet and even exceed the increasing demands of ship owners and operators for cost-effective and eco-friendly solutions. One example is the engine TBO (Time Between Overhauls) which we optimize on the basis of field data analysis and close inspection of engines and components that have already proven their reliability in field operation. Depending on the analysis results, we extend maintenance and TBO intervals keeping safe operation assured.

We offer product lines specifically tailored to customer requirements. Some are laid out for high power density with ideal power-to-weight-ratios. Other product lines are specifically configured to achieve maximum service life at lower power densities. These are suitable for applications involving high load factors and runtimes up to 8,000 hours per year).

POWER DEFINITION

The rated power of diesel and gas engines stated in this sales program corresponds to ISO 3046-1:2002 (E) and ISO 15550:2002 (E). The power produced at the flywheel will be within the tolerance of 3% - according to ISO 15550:2002 (E) - up to 25°C (77°F) combustion air temperature measured at the air cleaner inlet and up to 25°C (77°F) sea or raw water temperature measured at the seawater pump suction inlet, unless other values mentioned explicitly.

ICFN = ISO standard (continuous) fuel stop power
ICXN = ISO standard (continuous) power exceedable by 10% (ratings also apply to ISO 8665 and SAE J1228 standard conditions)

Barometric pressure: 1000 mbar
Site altitude above sea level: 100 m
Fuel specification for diesel: EN 590 to ASTM D 975-00
(Fuel consumption [with all pumps] in accordance with ISO 3046, values stated for IMO certification.)

General reference conditions for diesel engines and generator sets:

- Intake air temperature 25°C
- Sea water temperature 25°C


All engines are designed and built according to classification requirements, certificate on request.

- Classification with:
- Unrestricted service for engines with 10% overload capacity
 - Restricted service for engines without overload capacity

EXPLANATION OF THE ENGINE DESIGNATION

mtu Series 2000 / 4000 / 1163 / 8000 – Example


16 V 4000 M7 3 L

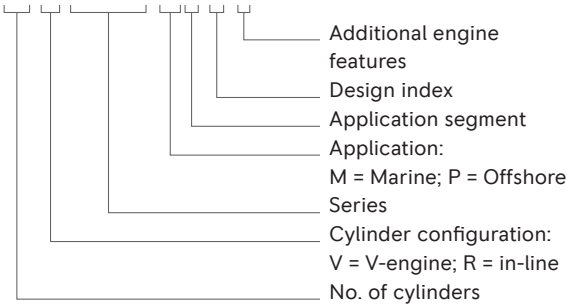

EXPLANATION OF THE GENSET DESIGNATION

Generator sets with *mtu* Series 4000 – Example

MG 1 2 V 4000 M3 5 S

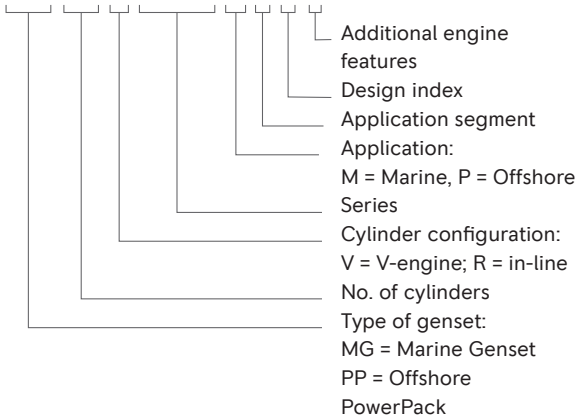


Additional engine/gensets features

Power uprated	L
Natural Gas	N
Power/speed reduced	R
Frequency	A or F (50 Hz); B or S (60 Hz)

New product introduction

mtu 12V 2000 M96Z PROPULSION ENGINE FOR IMO II AND EPA T3R

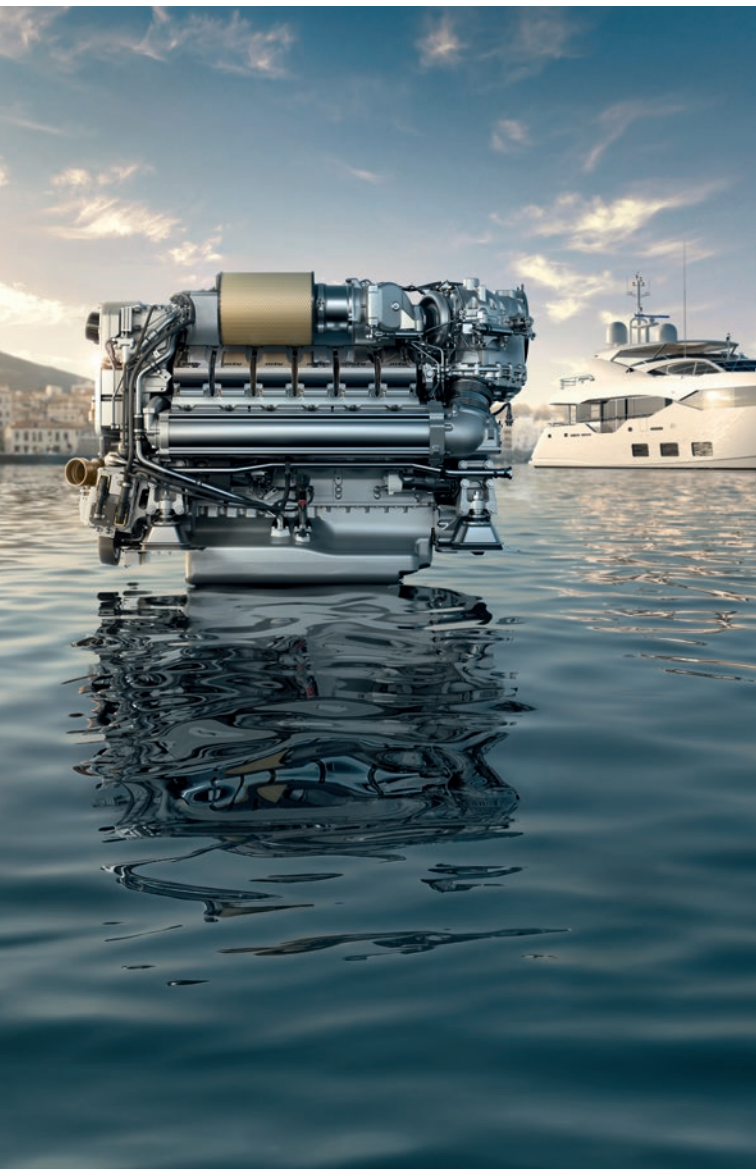

IMO II and EPA T3R

Superior engine performance combined with outstanding power density:

- Enhanced power output of 1634 kW / 2222 mhp
- Power density taken to the next level
- Increased power-to-volume ratio for installation space optimization
- Continuation of Series 2000 M06 fascinating acceleration behaviour

Increase of cylinder displacement and updated robust design with reinforced components:


- Slight increase on cylinder bore contributes to a displacement increase of approx. 4.5 %
- Reinforced crankcase, reinforced cylinder heads and new steel pistons ensure engine reliability and durability
- New turbocharging and fuel injectors for adapted combustion processes
- Adaptation of components such as camshaft, cylinder liners and coolers



Viking

mtu Series 4000 M05

LATEST GENERATION OF THE PROVEN SERIES 4000.

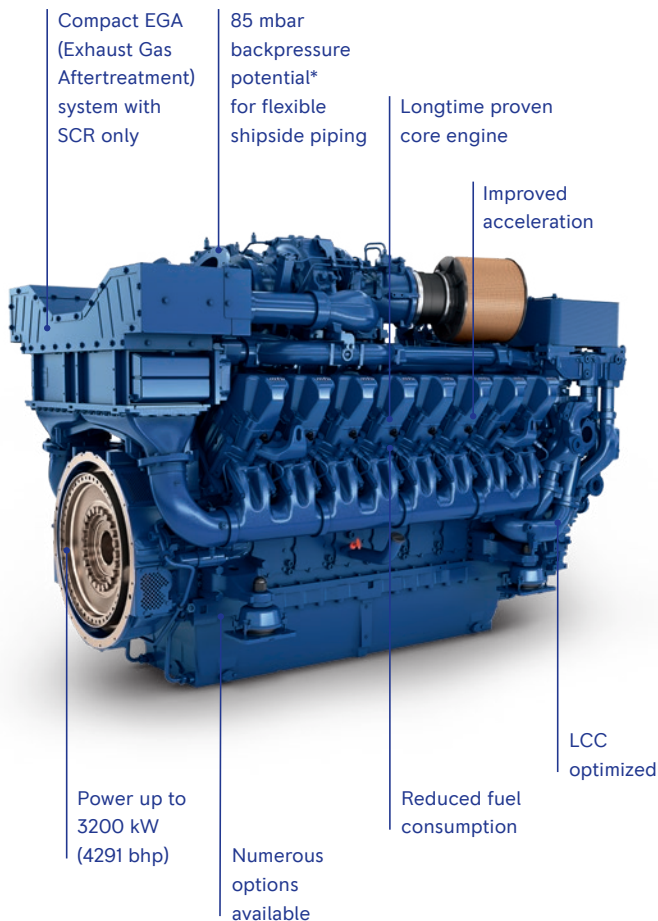

*after SCR-System

up to
3200 KW
(4291 BHP)

Our **mtu** Series 4000 M05 is the latest marine engine of our powerful Series 4000 family. When designing the **mtu** Series 4000 M05 we kept three topics always in our mind: Lifecycle costs, performance and ease of maintenance.

We used our legendary IRONMEN engines as a basis but finetuned it with high attention to detail to maximize durability, performance and efficiency. Only an SCR is needed to fulfill IMO III and EPA Tier 4 emissions regulations.



We also help customers to design and integrate the engine/ SCR combination into their vessel design.

more than
30 YEARS
OF
EXCELLENCE

ENGINES OVERVIEW



mtuSERIES 2000

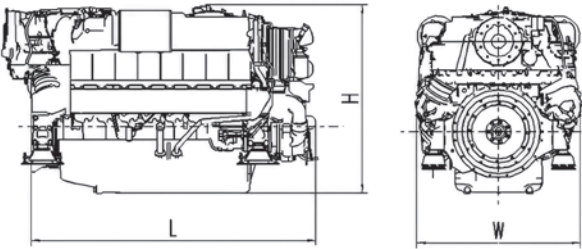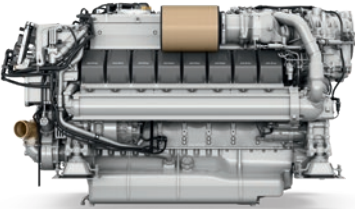

Marine and offshore

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 90°V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
10V 2000 M86/96	22.3 (1361)	1604x1165x1347 (63x46x53)	2305 (5082)
12V 2000 M86/96*	26.8 (1635)	1812x1293x1414 (71x46x53)	2810 (6195)
16V 2000 M86/96	35.7 (2179)	2258x1293x1453 (89x51x57)	3450 (7606)
16V 2000 M87/97/97L**	35.7 (2179)	3297x1648x2124*** (130x65x84)***	5020*** (11067)***



* with SAE1 flywheel housing
** with additional exhaust gas aftertreatment
*** with SOLAS thermal insulation for exhaust gas aftertreatment

Marine and offshore

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 90°V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
8V 2000 M72/84/94	17.9 (1093)	1379x1130x1200 (54x44x47)	1970 (4343)
10V 2000 M72	22.3 (1361)	1544x1130x1230 (61x44x48)	2230 (4916)
12V 2000 M72	26.8 (1635)	1869x1293x1364 (74x51x54)	2780 (6129)
16V 2000 M72	35.7 (2179)	2287x1293x1404 (90x51x55)	3337 (7357)

Engine mounted heat exchanger as standard.

mtu SERIES 4000

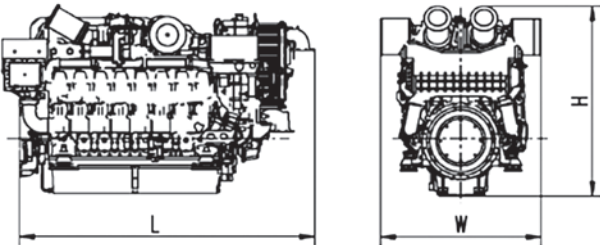

Marine and offshore

Standard stroke (190 mm)



Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 90°V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
12V 4000 M53B/M73/M93	51.7 (3155)	2870x1850x2185 (113x73x86)	8410 (18541)
16V 4000 M53B/M73/M93	69.0 (4210)	3510x1850x2185 (138x73x86)	9600 (21165)
20V 4000 M53B/M73/M93	86.2 (5260)	4040x1470x2440 (159x58x96)	12610 (27800)

For most of the models, engine mounted heat exchanger as standard, some models with external heat exchanger as option. Engine model specific weight & dimensions therefore only upon request.

Long stroke (210 mm)

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 90°V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
8V 4000 M23/ 24/33/53/54/63	38.2 (2331)	2386x1615x1972 (94x64x78)	5710 (12588)
8V 4000 M55RN	38.2 (2331)	2050 x 1820 x 2100 (81x72x83)	6100 (13448)
12V 4000 M23/ 33/53/63/24/34/ 54/64/35/65	57.2 (3491)	2750x1793x2370 (108x71x93)	8000 (17637)
16V 4000 M23/ 33/43/53/63/ 24/34/54/64/ 25/35/65	76.3 (4656)	3270x1570x2370 (129x62x93)	9460 (20856)
16V 4000 M55RN	76.3 (4656)	3233x1820x2100 (127x72x83)	9555 (21065)
20V 4000 M35/65	95.3 (5815)	3696x1573x2072 (146x62x82)	11180 (24648)

mtu SERIES 4000

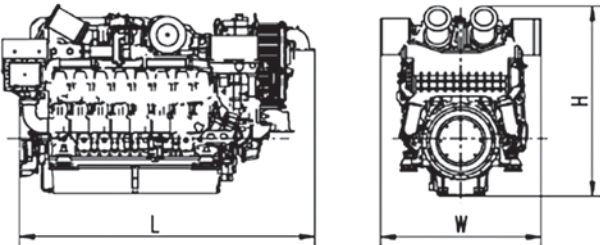




Offshore wind, exploration & production

Long stroke (210 mm)

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 90°V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
12V 4000 P63/83	57.2 (3491)	2530x1590x2065 (100x63x81)	7300 (16093)
16V 4000 P63/83	76.3 (4656)	3000x1590x2065 (118x63x81)	8800 (19400)
20V 4000 P63/83	95.4 (5822)	3470x1590x2065 (137x63x81)	10680 (23545)

4000P03 models are available with external heat exchanger and 2-circuit cooling system only.

mtu SERIES 1163



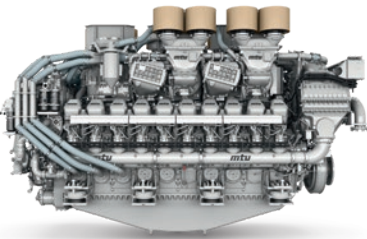


Marine and offshore

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 60°V	l (cu in)	L x W x H mm (in)	(dry) kg (lbs.)
16V 1163	186.1 (11357)	4685x2000x2896 (184x79x114)	21240 (46826)
20V 1163	232.6 (14194)	5345x2000x3034 (210x79x119)	24960 (55027)

External heat exchanger version as standard.

mtu SERIES 8000

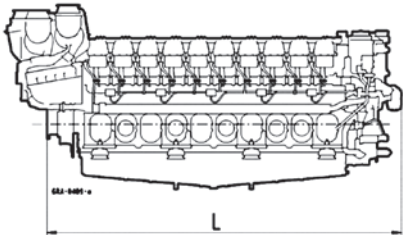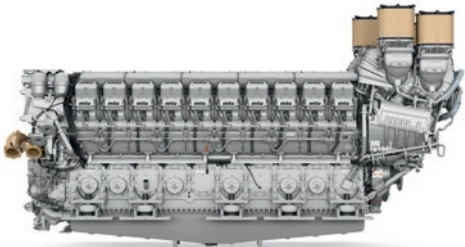


Marine and offshore

Engine	Displacem. total	Dimensions, max.	Mass, max.
Cylinder config.: 48°V	l (cu in)	L x W x H mm (in)	(dry) kg (lbs.)
16V 8000	277.9 (16959)	5682x2279x3410 (224x90x134)	41800 (92154)
20V 8000	347.4 (21200)	6622x2279x3439 (261x90x135)	48840 (107674)

External heat exchanger version as standard.


mtu SERIES 4000
50 HZ / 400 V AND 60 HZ / 450 V

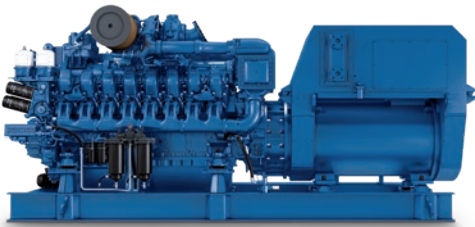

Marine and offshore

Genset model*	Displacem. total	Dimensions, max.	Mass, max.
50 Hz / 400 V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
MG08V4000 M23F/M33F	38.2 (2331)	4300x1825x2000 (169x72x79)	10500
MG12V4000 M23F/M33F	57.2 (3491)	4600x1825x2285 (181x72x90)	14000
MG12V4000 M35F	57.2 (3491)	4800x1825x2285 (185x72x90)	15500
MG16V4000 M23F/M33F	76.3 (4656)	5400x1825x2285 (213x72x90)	17000
MG16V4000 M35F	76.3 (4656)	5700x1825x2285 (224x72x90)	18000

* Standard configuration: external engine heat exchanger, flange mounted, water cooled (IP54) synchronous generator (50 Hz - 400 V / 60 Hz - 450 V)

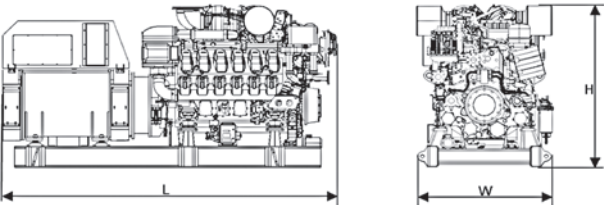

Marine and offshore

Genset model*	Displacem. total	Dimensions, max.	Mass, max.
60 Hz / 450 V	l (cu in)	LxWxH mm (in)	(dry) kg (lbs.)
MG08V4000 M23S/M33S	38.2 (2331)	4300x1825x2000 (169x72x79)	10500
MG12V4000 M23S/M33S	57.2 (3491)	4600x1825x2285 (181x72x90)	14500
MG12V4000 M35S	57.2 (3491)	4900x1825x2285 (193x72x90)	16000
MG16V4000 M23S/M33S/ M43S	76.3 (4656)	5700x1965x2285 (224x77x90)	18000
MG16V4000 M25S/M35S	76.3 (4656)	5700x1965x2285 (224x77x90)	20000
MG20V4000 M35S	95.2 (5809)	6300x1965x2285 (248x77x90)	25000

Options: 690 V, air cooled generators, and more options available on request Gensets version with double resilient mounting systems for higher crew comfort also available.

DIESEL/GAS ENGINES FOR MECHANIC PROPULSION



Diesel/gas engines for mechanic propulsion

720 KW - 1939 KW (966 BHP - 2600 BHP)

mtu Series 2000

Engine model	Rated power ICFN			Application group		
	kW	bhp	rpm	1A	1B	1D
8V 2000 M72	720	966	2250		■	
8V 2000 M84	810	1085	2450			■
8V 2000 M84L	895	1200	2450			■
10V 2000 M72	900	1205	2250		■	
8V 2000 M94	932	1250	2450			
10V 2000 M86	1015	1360	2450			■
12V 2000 M72	1080	1450	2250		■	
10V 2000 M96	1120	1500	2450			
10V 2000 M96L	1193	1600	2450			
12V 2000 M86	1268	1700	2450			■
12V 2000 M96	1342	1800	2450			
12V 2000 M96L	1432	1920	2450			
16V 2000 M72	1440	1930	2250		■	
12V 2000 M96X#	1472	2002	2450			
16V 2000 M86	1630	2186	2450			■
16V 2000 M87	1630	2186	2450			■
12V 2000 M96Z#	1634	2222	2450			
16V 2000 M96	1790	2400	2450			
16V 2000 M97	1790	2400	2450			
16V 2000 M96L	1939	2600	2450			
16V 2000 M97L	1939	2600	2450			

For 12V 2000 M96X and M96Z, power rating = mhp
* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.

Applic. group	Fuel consump. at rated power		Optim.	Emissions Optimization			
	g/kWh	l/h		IMO	EPA	EU	CN
1DS	214	186	197	II	T2c*	IIIA*	C1*
	218	213	192	II	T2c*	CCNR II	C1*
	227	245	194	II	T2c*	-	C1*
	213	231	188	II	T2c*	IIIA*	C1*
■	226	254	195	II	T2c*	CCNR II	C1*
	219	268	192	II	T3r/T3c*	RCD 2	C2
	208	271	195	II	T2c*	IIIA*	C1*
■	220	297	192	II	T3r	RCD 2	C2
■	223	320	192	II	T3r	RCD 2	C2
	214	327	196	II	T3r/T3c*	RCD 2	C2
■	215	348	195	II	T3r	RCD 2	C2
■	216	373	193	II	T3r	RCD 2	C2
	209	363	197	II	T2c*	IIIA*	C1*
■	218	387	195	II	T3r	RCD 2	C2
	217	426	193	II	T3r/T3c*	RCD 2	C2
	205	403	195	III	T3r	RCD 2	-
■	211	415	191	II	T3r	RCD 2	-
■	215	464	190	II	T3r	RCD 2	C2
■	207	446	192	III	T3r	RCD 2	-
■	216	505	190	II	T3r	RCD 2	C2
■	212	495	192	III	T3r	RCD 2	-

Mechanic propulsion

Diesel/gas engines for mechanic propulsion

746 KW - 2000 KW
(1000 BHP - 2688 BHP)

mtu Series 4000

Engine model	Rated power			Application group		
	ICFN			1A	1B	1D
	kW	bhp	rpm			
8V 4000 M53R	746	1000	1600	■		
8V 4000 M55RN	746	1000	1600	■		
8V 4000 M54R	746	1000	1600	■		
8V 4000 M54	895	1199	1800	■		
8V 4000 M53	920	1234	1800	■		
8V 4000 M63	1000	1340	1800	■		
12V 4000 M55R	1119	1499	1600	■		
12V 4000 M53R	1140	1529	1600	■		
12V 4000 M54	1193	1600	1800	■		
12V 4000 M53	1380	1851	1800	■		
12V 4000 M64	1398	1875	1800	■		
12V 4000 M65R	1492	2001	1600	■		
16V 4000 M55RN	1492	2001	1600	■		
12V 4000 M63	1500	2016	1800	■		
16V 4000 M53R#	1520	2038	1600	■		
12V 4000 M65L	1680	2252	1800	■		
16V 4000 M54	1685	2260	1800	■		
16V 4000 M53	1840	2473	1800	■		
12V 4000 M65L	1920	2575	1800	■		
16V 4000 M63R*	1920	2575	1600	■		
12V 4000 M73	1920	2575	1970		■	
16V 4000 M64	1999	2681	1800	■		
16V 4000 M63	2000	2688	1800	■		
16V 4000 M65R	2000	2688	1600	■		

1492 kW with 1600 rpm available on request
* 1840 kW with 1600 rpm available on request

Applic. group	Fuel consump. at rated power		Optim.	Emissions Optimization			
	g/kWh	l/h		IMO	EPA	EU	CN
1DS							
	206	185	196	II	T2c*	IIIA*	-
	203	-	195	III	-	-	-
	206	185	196	II	T3c*	-	-
	212	228	196	II	T3c*	-	C2
	208	231	192	II	T2c*	IIIA*	-
	209	252	189	II/III	T2c*	IIIA*	-
	198	267	196	III	T4c	-	-
	201	276	200	II	T2c*	IIIA*	-
	209	300	195	II	T3c*	-	C2
	201	334	196	II	T2c*	IIIA*	C1*
	211	355	200	II	T3c*	-	C2
	194	349	190	II/III**	T4c	-	-
	204	-	195	III	-	-	-
	201	363	196	II	T2c*	IIIA*	C1*
	199	364	198	II	T2c*	IIIA*	-
	203	411	202	II/III	T4c	-	-
	206	417	195	II	T3c*	-	C2
	199	441	198	II	T2c*	IIIA*	C1*
	204	472	202	II/III	T4c	-	-
	203	468	203	II	-	-	-
	212	490	210	II	T2c*	-	C1*
	202	485	194	II	T3c*	-	C2
	199	480	192	II	T2c*	IIIA*	C1*
	198	477	196	II/III	T4c	-	-

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. Local exemptions may apply.
** fuel consumption values for IMO II/III on request
*** fuel consumption values for EPA T4/4c on request

Diesel/gas engines for mechanic propulsion

2160 KW - 10000 KW
(2895 BHP - 13410 BHP)

mtu Series 4000

Engine model	Rated power			Application group		
	ICFN			1A	1B	1D
	kW	bhp	rpm			
12V 4000 M73L	2160	2895	2050		■	
16V 4000 M65L	2176	2918	1800	■		
16V 4000 M65	2240	3004	1800	■		
16V 4000 M63L	2240	3004	1800	■		
16V 4000 M65L	2240	3004	1800	■		
12V 4000 M93	2340	3145	2100			
16V 4000 M65L	2350	3151	1800	■		
16V 4000 M73	2560	3433	1970		■	
16V 4000 M65L	2560	3433	1800	■		
12V 4000 M93L	2580	3460	2100			
20V 4000 M65L	2800	3755	1800	■		
16V 4000 M73L	2832	3798	2050		■	
16V 4000 M73L	2880	3862	2050		■	
16V 4000 M93	3120	4185	2100			
20V 4000 M65L	3200	4291	1800	■		
20V 4000 M73	3200	4291	1970		■	
16V 4000 M93L	3440	4615	2100			
20V 4000 M73L	3540	4747	2050		■	
20V 4000 M73L	3600	4830	2050		■	
20V 4000 M93	3900	5242	2100			
20V 4000 M93L	4300	5780	2100			

mtu Series 1163

16V 1163 M74	4800	6437	1250		■	
16V 1163 M84	5200	6973	1280			■
16V 1163 M94	5920	7939	1325			
20V 1163 M74	6000	8046	1250		■	
20V 1163 M84	6500	8717	1280			■
20V 1163 M94	7400	9923	1325			

mtu Series 8000

16V 8000 M71L	7280	9763	1150		■	
16V 8000 M91L	8000	10728	1150			
20V 8000 M71	8200	10996	1150		■	
20V 8000 M71L	9100	12203	1150		■	
20V 8000 M91L	10000	13410	1150			

N = Gas engine

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.

Mechanic propulsion

Applic. group	Fuel consump. at rated power		Optim.	Emissions Optimization			
	1DS	g/kWh l/h		IMO	EPA	EU	CN
		213 554	210	II	T2c*	-	C1*
		199 522	192	II/III	T4c	-	-
		202 545	193	II	-	-	-
		195 526	194	II	T2c*	IIIA*	C1*
		199 537	192	III	T4c	-	-
■		216 609	205	II	T2c*	-	C1*
		200 566	192	II/III	T4c	-	-
		218 672	205	II	T2c*	-	C1*
		201 619	192	II/III	T4c	-	-
■		217 675	205	II	T2c*	-	-
		209 705	202	II/III	-	-	-
		219 747	210	II/III**	-	-	-
		220 763	205	II	T2c*	-	C1*
■		224 842	205	II/III**	T2c*	-	C1*
		208 802	202	II/III	-	-	-
		213 821	210	II	T2c*	-	-
■		230 953	205	II	T2c*	-	-
		219 934	210	II/III	-	-	-
		212 920	210	II	T2c*	-	-
■		212 996	205	II/III	T2c*	-	C1*
■		220 1140	210	II	T2c*	-	C1*
		210 1214	202	II/III**	-	-	-
		205 1284	200	II/III**	-	-	-
■		212 1512	201	II/III**	-	-	-
		208 1504	195	II	-	-	-
		208 1629	195	II	-	-	-
■		210 1872	195	II/III**	-	-	-
		195 1710	190	II/III**	T2c*	-	-
■		199 1918	188	II/III**	-	-	-
		197 1946	183	II/III**	T2c*	-	-
		198 2149	184	II/III**	T2c*	-	-
■		198 2386	185	II/III**	-	-	-

** fuel consumption values for IMO III on request

*** fuel consumption values for EPA T4c on request

ENGINES AND GENSETS FOR ON-BOARD POWER GENERATION AND ELECTRIC PROPULSION



Engines and gensets for on-board power generation and electric propulsion – 50 Hz @ 1500 rpm

760 KW - 2600 KW

mtu Series 4000

Engine model	Rated power ICFN	Genset model	Rated power	
	kW		kWe	kVA
8V 4000 M23F	760	MG08V4000M23F	720	900
8V 4000 M33F	880	MG08V4000M33F	830	1038
12V 4000 M23F	1140	MG12V4000M23F	1080	1350
12V 4000 M33F	1320	MG12V4000M33F	1260	1575
12V 4000 P63	1350	PP12V4000P63	1300	1625
12V 4000 M35F	1380	MG12V4000M35F	1330	1660
16V 4000 M23F	1520	MG16V4000M23F	1460	1825
12V 4000 P63	1560	PP12V4000P63	1500	1875
12V 4000 M35F	1560	MG12V4000M35F	1500	1875
16V 4000 M33F	1760	MG16V4000M33F	1680	2100
16V 4000 P63	1800	PP16V4000P63	1720	2150
16V 4000 M35F	1840	MG16V4000M35F	1760	2200
16V 4000 M35F	2080	MG16V4000M35F	2000	2500
16V 4000 P63	2080	PP16V4000P63	2000	2500
20V 4000 P63	2245	PP20V4000P63	2150	2688
20V 4000 P63	2600	PP20V4000P63	2500	3125

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.

** fuel consumption values for IMO III on request

Applic. group		Fuel consump.				Emissions Optimization		
		at 75%		at 100%		IMO	EPA	EU
3A	3B	g/kWh	l/h	g/kWh	l/h			
■		216	148	207	189	II	-	-
	■	211	167	205	217	II	-	-
■		211	217	200	274	II	-	-
	■	205	244	197	312	II	-	C1*
■		204	248	204	331	II	-	-
	■	201	251	199	331	II/III	-	-
■		210	287	201	367	II	-	-
	■	202	284	202	378	II	-	-
	■	202	285	200	376	II/III	-	-
	■	205	325	199	420	II	-	C1*
■		201	326	198	428	II	-	-
	■	203	338	198	439	II/III	-	-
	■	200	376	197	494	II/III	-	-
	■	199	373	197	494	II	-	-
■		210	425	207	558	II	-	-
	■	206	482	211	659	II	-	-

50 Hz – On-board power gen. & electric prop.

Engines and gensets for on-board power generation and electric propulsion – 60 Hz @ 1800 rpm

895 KW - 3200 KW

mtu Series 4000

Engine model	Rated power ICXN	Genset model	Rated power	
	kW		kWe	kVA
8V 4000 M24S	895	MG08V4000M24S	850	1063
8V 4000 M23S	920	MG08V4000M23S	870	1088
8V 4000 M33S	1040	MG08V4000M33S	990	1238
12V 4000 M24S	1193	MG12V4000M24S	1140	1425
12V 4000 M23S	1380	MG12V4000M23S	1310	1638
12V 4000 M34S	1398	MG12V4000M34S	1340	1675
12V 4000 P83	1455	PPI2V4000P83	1400	1750
12V 4000 M33S	1560	MG12V4000M33S	1480	1850
12V 4000 M53B	1650	MG12V4000M53B	REQ.	REQ.
12V 4000 P83	1680	PP12V4000P83	1610	2013
12V 4000 M35S	1680	MG12V4000M35S	1610	2013
16V 4000 M23S	1840	MG16V4000M23S	1760	2200
12V 4000 M35S	1920	MG12V4000M35S	1840	2300
16V 4000 P83	1940	PPI6V4000P83	1860	2325
16V 4000 M34S	1999	MG16V4000M34S	1920	2400
16V 4000 M33S	2080	MG16V4000M33S	2000	2500
16V 4000 M53B	2200	MG16V4000M53B	REQ.	REQ.
16V 4000 M43S	2240	MG16V4000M43S	2150	2688
16V 4000 M25S	2240	MG16V4000M25S	2150	2688
16V 4000 M35S	2240	MG16V4000M35S	2150	2688
16V 4000 P83	2240	PPI6V4000P83	2150	2688
20V 4000 P83	2425	PP20V4000P83	2320	2900
16V 4000 M35S	2560	MG16V4000M35S	2460	3075
20V 4000 P83	2800	PP20V4000P83	2700	3375
20V 4000 M35S	2800	MG20V4000M35S	2700	3375
20V 4000 M53B	3015	MG20V4000M53B	REQ.	REQ.
20V 4000 M35S	3200	MG20V4000M35S	3100	3875

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.
** fuel consumption values for IMO III on request

Applic. group		Fuel consump.				Emissions Optimization		
3A	3B	at 75%		at 100%		IMO	EPA	EU
		g/kWh	l/h	g/kWh	l/h			
■		219	176	215	231	II	T3c*	-
■		221	183	211	233	II	T2c*	-
	■	218	204	210	262	II	T2c*	-
■		221	237	208	298	II	T3c*	C2
■		215	267	205	340	II	T2c*	C1*
	■	223	499	210	352	II	T3c*	C2
■		211	276	203	355	II	T1NRM*	-
	■	210	295	206	386	II	T2c*	C1*
■		215	319	211	418	II	-	-
	■	207	313	207	418	II	T1NRM*	-
	■	210	319	207	419	II/III	-	-
■		214	355	207	457	II	T2c*	C1*
	■	207	359	207	479	II/III	-	-
■		211	369	205	477	II	T1NRM*	-
	■	228	410	202	484	II	T3c*	C2
	■	209	393	203	509	II	T2c*	C1*
	■	208	414	208	551	II	-	-
	■	208	421	203	548	II	T2c*	-
■		208	421	207	559	II	-	-
	■	207	420	207	559	III	-	-
	■	205	413	204	549	II	T1NRM*	-
■		211	461	209	608	II	T1NRM*	-
	■	207	479	207	638	II/III**	-	-
	■	209	527	215	723	II	-	-
	■	210	531	207	698	II/III	-	-
	■	214	583	204	741	II/III	-	-
	■	206	596	205	790	II/III	-	-

60 Hz – On-board power gen. & electric prop.

Engines and gensets for on-board power generation and electric propulsion – variable speed genset

720 KW - 3200 KW

mtu Series 2000

Engine model	Rated power	Speed range / power	
	***	***	
	kW	rpm	kWe
8V 2000 M72	720	~ 1200 - 2250	675
10V 2000 M72	900	~ 1200 - 2250	850
10V 2000 M86	1015	~ 1200 - 2450	965
12V 2000 M72	1080	~ 1200 - 2250	1020
12V 2000 M86	1268	~ 1200 - 2450	1205
16V 2000 M72	1440	~ 1200 - 2250	1370
16V 2000 M86	1630	~ 1200 - 2450	1550

mtu Series 4000

8V 4000 M63	1000	~ 900 - 1800	960
12V 4000 M63	1500	~ 900 - 1800	1440
12V 4000 M65L	1680	~ 900 - 1800	1610
12V 4000 M65L	1920	~ 900 - 1800	1840
16V 4000 M63L	2240	~ 900 - 1800	2150
16V 4000 M65L	2240	~ 900 - 1800	2150
16V 4000 M65L	2560	~ 900 - 1800	2460
20V 4000 M65L	2800	~ 900 - 1800	2700
20V 4000 M65L	3200	~ 900 - 1800	3100

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.

** fuel consumption values for IMO III on request

*** Continuous operation with variable speed / load

The above is only a selection of recommended variable speed gensets; Other versions on request. Variable speed gensets with Series 4000 M55RN (natural gas) also available on request.

Rating definition: ICFN, temporary 10% overload capability for load steps

Fuel consump. at 100% **		Emissions			
g/kWh	l/h	IMO	EPA	EU	CN
214	186	II	T2c*	IIIA*	C1*
213	231	II	T2c*	IIIA*	C1*
219	268	II	T3r/T3c*	RCD2	C2
208	271	II	T2c*	IIIA*	C1*
214	327	II	T3r/T3c*	RCD2	C2
209	363	II	T2c*	IIIA*	C1*
217	426	II	T3r/T3c*	RCD2	C2
209	252	II/III	T2c*	IIIA*	-
201	363	II	T2c*	IIIA*	C1*
203	411	II/III	T4c	-	-
204	472	II/III	T4c	-	-
195	526	II	T2c*	IIIA*	C1*
199	537	II/III	T4c	-	-
201	619	III	T4c	-	-
209	705	II/III	T4c	-	-
208	802	II/III	-	-	-

Variable – On-board power gen. & electric prop.

ENGINES AND GENSETS FOR OFFSHORE WIND AND EXPLORATION & PRODUCTION



Photo: Øyvind Hagen/Statoil



Engines and gensets for offshore power generation –
50 Hz @ 1500 rpm

1350 KW - 2600 KW
(1810 BHP - 3487 BHP)

mtu Series 4000

Engine model	Rated power ICXN		Genset model	Rated power	
	kW			kWe	kVA
12V 4000 P63	1350	1810	PP12V4000P63	1295	1620
12V 4000 P63	1560	2092	PP12V4000P63	1500	1875
16V 4000 P63	1800	2414	PP16V4000P63	1730	2160
16V 4000 P63	2080	2789	PP16V4000P63	2000	2500
20V 4000 P63	2245	3011	PP20V4000P63	2155	2695
20V 4000 P63	2600	3487	PP20V4000P63	2500	3120

Application group			Fuel consump.				Emissions Optimization	
			at 75%		at 100%		IMO	EPA
3A	3B	3C	g/kWh	l/h	g/kWh	l/h		
■			204	248	204	331	II	–
	■	■	202	284	202	378	II	–
■			201	326	198	428	II	–
	■	■	199	373	197	492	II	–
■			210	425	207	558	II	–
	■	■	206	482	211	659	III	–

Engines and gensets for offshore power generation –
60 Hz @ 1800 rpm

1455 KW - 2800 KW

(1951 BHP - 3755 BHP)

Engine model	Rated power ICXN		Genset model	Rated power	
	kW			kWe	kVA
12V 4000 P83	1455	1951	PP12V4000P83	1395	1745
12V 4000 P83	1680	2253	PP12V4000P83	1615	2015
16V 4000 P83	1940	2602	PP16V4000P83	1860	2330
16V 4000 P83	2240	3004	PP16V4000P83	2150	2690
20V 4000 P83	2425	3252	PP20V4000P83	2330	2910
20V 4000 P83	2800	3755	PP20V4000P83	2690	3360

* emission stage has been superseded, therefore engine is not available with certificate, but compliant only. local exemptions may apply.

Application group			Fuel consump.				Emissions Optimization	
			at 75%		at 100%		IMO	EPA
3A	3B	3C	g/kWh	l/h	g/kWh	l/h		
■			211	276	203	355	II	T2NRMM*
	■	■	207	313	207	418	II	T2NRMM*
■			211	369	205	477	II	T2NRMM*
	■	■	205	413	204	549	II	T2NRMM*
■			211	461	209	608	II	T2NRMM*
	■	■	209	527	215	723	III	T2NRMM*

EMISSION REDUCTION TECHNOLOGIES



Emission reduction technologies

SCR SOLUTION

SCR solution

Knowing that installation space inside engine rooms is limited, we developed an airless selective catalytic reduction (SCR) solution that is particularly compact and maintenance-friendly. In addition to doors that enable easy access for SCR catalyst replacement, the system features integrated diesel exhaust fluid (DEF) dosing directly in the SCR. By eliminating the need for a separate DEF mixing pipe, it provides tremendous pipework flexibility between the engine and the SCR box. The space needed to fit the exhaust gas aftertreatment is kept to a bare minimum. Ammonia slips are prevented by a closed loop regulated control system.





Besides the exhaust emissions related features, our SCR system also reduces noise.

SCR - the ideal solution for the marine world

When using EGR (Exhaust Gas Recirculation) technology, the quality of the fuel is essential. Fuel with more than 15 ppm sulfur will lead to the formation of sulfur acid in the EGR cooling process. Sulfur acid will cause substantial engine failures over time. As many vessels operate worldwide, especially in the offshore service and supply business, **mtu** evaluates SCR as the preferred solution to maintain reliability of our engines and the safety of your vessel and crew. SCR technology allows operation with lower fuel quality

Developing all major key technologies inhouse like, SCR, EGR, turbocharging and common rail fuel injection, means we are able to shape the ideal solution to meet IMO III and EPA Tier 4 emissions regulations.

At **mtu** we treat EGR as the ideal solution for applications like mining or oil&gas onshore, but within the marine world we are convinced that SCR technology grants much higher availability and component lifetime.

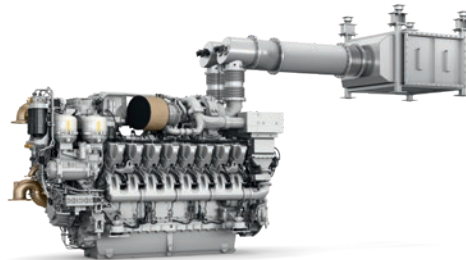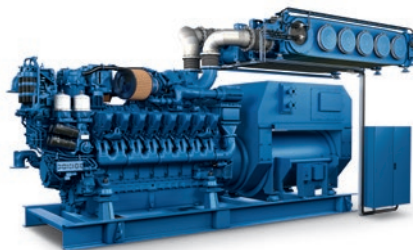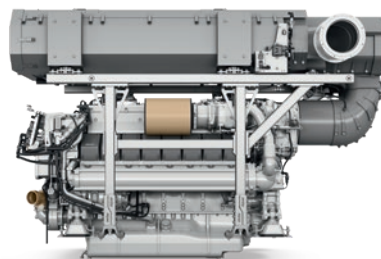
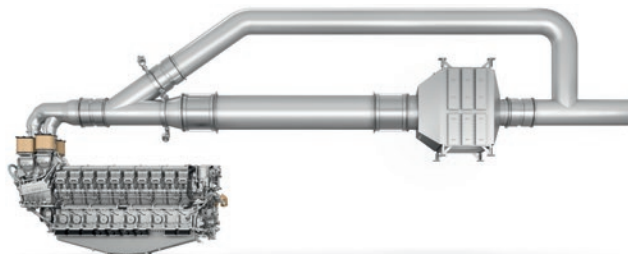
NEW: Flex box SCR for **mtu** Series 4000Flat box SCR for **mtu** Series 4000 generator set**mtu** Series 2000 M97 with SCR**mtu** Series 8000 with SCR

Emission reduction technologies


A LONGTIME PROVEN MARINE ENGINE
- THE *mtu* SERIES 4000 M05.

30 years ago, in 1996 the first Series 4000 marine engine was presented at SMM exhibition in Hamburg. Since then, the Series 4000 is trusted in numerous applications.

With more than 66,000 Series 4000 engines sold worldwide we gained experience from more than 355,000,000 operating hours which were directly fed into the development of the next generation of our marine workhorses. As an expert for tough applications like mining, oil&gas, rail and marine, we were always ready to go the next step - ahead of everyone else.

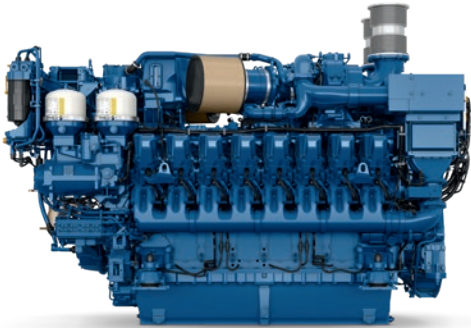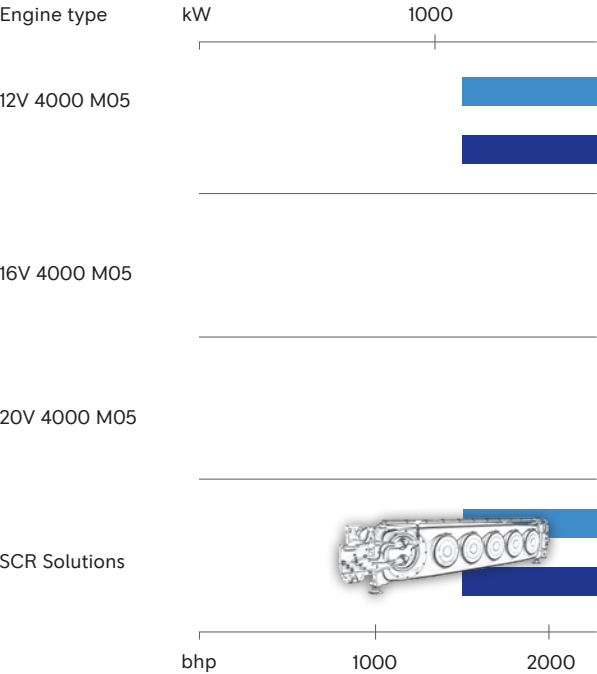

This is just as true today, as it was in 1996 when we introduced the first high speed diesel engine with common rail fuel injection. In 2016 we launched the only high-speed diesel engine capable of up to 3200 kW (4291 bhp).

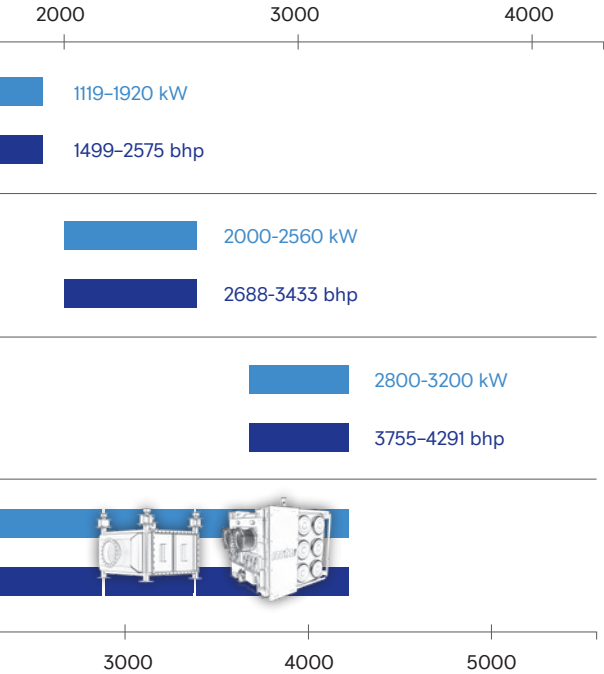

SYSTEMS SOLUTIONS



Systems solutions

SYSTEM EXPERTISE

We are one of the world's leading manufacturers of propulsion and power generation systems for marine applications:

mtu products are used on all the world's oceans and in all marine areas.

For us, being a systems supplier means taking complete care of our customer's needs at any point of the life cycle. Our key technologies in diesel engine development and manufacturing comprising:

- Turbo charging units
- Fuel injection systems
- Engine management systems
- Automation systems

The key technologies are completed by validated and proven accessories like:

- Fuel treatment and filtration units
- Resilient engine mounts
- Resilient- and offset compensating couplings
- Gearboxes
- Exhaust silencers

Noise reduction technology

Double resilient mounting systems and a variety of rubber mount solutions are available for applications with the highest acoustic demands, such as comfort yachts or research vessels.

Emissions reduction technology

In addition to low emission diesel engines, we offer exhaust after treatment systems to meet the most stringent emissions requirements.

- Selective catalytic reduction (SCR) units:
 - Reduction of NOx emissions of diesel engines
 - Enables customers to achieve IMO Tier III emission levels with current Tier II engines.
- Diesel particulate filters (DPF):

The new **mtu** engine generations, especially of the **mtu** Series 2000 & 4000 are exceeding emission regulation limits and are optimized to reduce soot also during transient operation.

Therefore particulate filters (DPF) are requested for special applications only:

 - Active filter regeneration via burner
 - Enabled for low load operation
 - Optimum in system reliability
 - PM-reduction up to 99 %
 - Class certified: LR, GL

Gas-protected operation

In order to maintain a high level of safety in dangerous, explosive environments, some engines of the **mtu** Series 4000 and 8000 can be equipped for gas protection around flammable or explosive gases. Engines are equipped with a safety package that meets with the related operational conditions.

For further information, please contact your distributor or visit www.mtu-solutions.com/contact

Systems solutions

COMBINED PROPULSION SYSTEMS

Our engineering expertise and operating experience covers a large range of combined propulsion systems, such as:

- Combined Diesel and Diesel (CODAD)
- Combined Diesel and/or Gas Turbine (CODAG, CODOG)
- Combined Diesel-Electric and Gas Turbine (CODELAG)
- E-Drive Systems - Combined Diesel and/or Electric or Hybrid


The intelligent combination of diesel engines, electric motors, gas turbines and batteries allows optimal adaptation of the propulsion system to the various operational requirements.

In order to reduce emissions and operating costs, combined systems e.g. diesel-electric propulsion systems are the preferred solution: The mechanical energy produced by the diesel engine is converted into electricity using a generator and then transmitted to the electric motors driving the ship's propellers.


By adding battery modules for energy storage we can also provide cutting edge hybrid propulsion systems.

On request, we will serve as the general contractor, taking complete technical and commercial responsibility for the entire propulsion and power generation system as well as the automation system. From project engineering and project management to support and service, we are your single source partner for complete solutions.

Propulsion systems

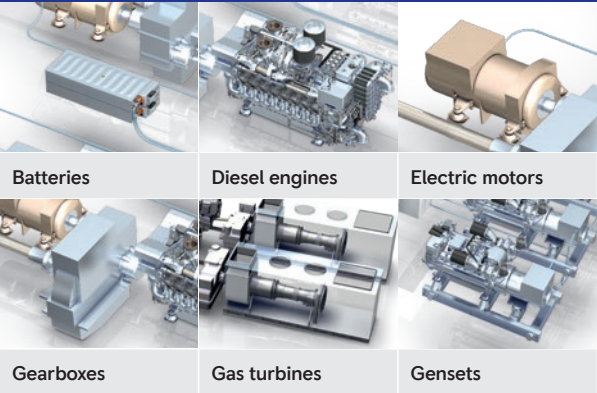

Application example of complete propulsion system

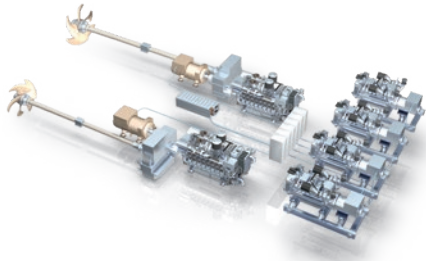


All systems can drive various kinds of propulsors, e.g. FPP, CPP, WJ, Voith Schneider, also in combination with CODAD, CODOG, CODAG, CODELAG or E-Drive propulsion systems.

Systems solutions

QUIET. CLEAN. SMART. THE **mtu** HYBRID PROPULSIONPACK

Get the best of two worlds in green, modular and flexible propulsion efficiency. Not only does hybrid power reduce on-board noise levels, emissions and vibrations, it also improves dynamics and comfort.

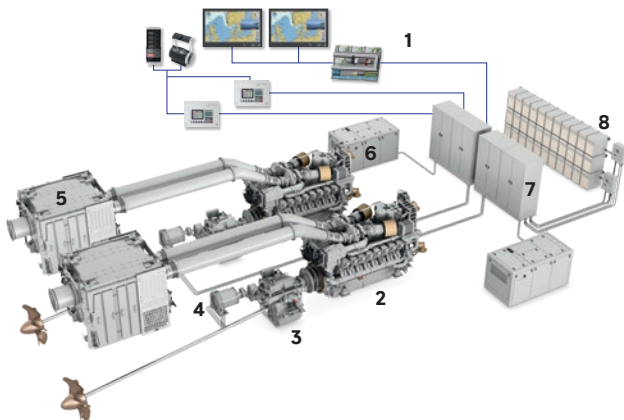

Example illustration of
mtu Hybrid PropulsionPack
 with **mtu** Series 4000 engines

- | | |
|---|---------------------------|
| 1 mtu NautIQ Drive control & monitoring system | 5 SCR System |
| 2 mtu Series 4000 engine | 6 Genset |
| 3 Gearbox | 7 Power distribution unit |
| 4 Electric machine | 8 BatteryPack |



Intelligent, intuitive vessel control thanks to cutting-edge automation



Seamless component integration



Silent, emission-free operation in sensitive areas



Wide-ranging propulsion options

The components for onboard power and propulsion are modular and scalable. Each hybrid system can be individually designed to meet your requirements.

Enjoy the benefits of battery-powered silent and emission-free propulsion and electrical onboard power whilst sailing and anchoring in sensitive areas.

Combination for perfect power availability for any scenario:

Silent and eco-friendly cruising

Imagine a vessel which moves like by magic, with no noise, no vibration & no air pollution resolving into superior comfort. The silent mode offers an enjoyable journey through coastal or nature reserve areas without the side effects of a conventional propulsion system.


Performance

Combining the best out of two different worlds, the high torque of an electric machine and the superior power density of a combustion engine, resulting in a compact high performance system.


Systems solutions

MARINE GENSETS


Our marine genset portfolio includes solutions based on **mtu** Series 2000 and Series 4000 engines. Whether you are looking for onboard power, diesel-electric or hybrid propulsion, our gensets meet the full spectrum of requirements.

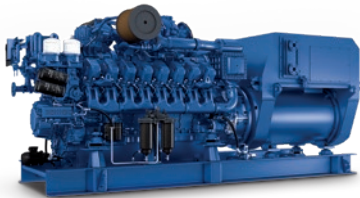


Standardized
commercial
generator set



Premium
generator set

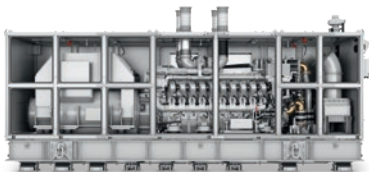

Generator set
with
sound enclosure

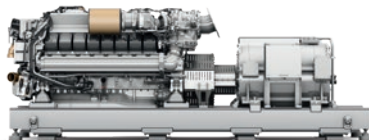

Compact
variable speed
generator sets

Our gensets are available as a constant speed version in 50 or 60 Hz or as a variable speed configuration. Configurations range from cost-effective commercial solutions to high-end yacht gensets.

Emergency and lower-power gensets are also available as separate power units for critical onboard applications.

Your benefits are:

- Proven **mtu** Series 4000 technology with over 66,000 engines sold worldwide
- Outstanding acoustic optimization for best-in-class comfort (noise and vibration levels can be contractually guaranteed, with all values proven on our test benches to minimize risk)
- Featuring special plug-and-play technology such as media plate and integrated piping for very easy installation
- All our gensets are classifiable according to e.g. DNV, LR
- Gensets with high quality finishing and painting dedicated for the yacht market

Now new: Compact high-performance gensets

- Our compact high-performance gensets are based on **mtu** Series 2000 engines and deliver high power density for demanding marine applications. They cover a power range from 700 kW to 1400 kW for medium-duty operation and up to 1900 kW for light-duty applications, such as range extenders for battery-electric vessels. Frameless versions are also available for optimized weight and installation flexibility.

Systems solutions

OFFSHORE GENERATOR SETS


We offer complete solutions from a single supplier. All components are integrated, thoroughly tested and supported. Everything is designed to work together, which prolongs preventive maintenance and overhaul intervals. Decades of experience as an offshore specialist gives us the expertise and flexibility you need to keep your drilling operation productive and profitable.

Our offshore product range includes diesel engines and systems for:


- Generator sets for emergency, essential, auxiliary and main power
- Fire pump drivers for mechanical/hydraulic/electric installations
- Mud pump drivers
- Wellserve power packs
- Nitrogen units
- Cranes
- Cement pumps
- Hydraulic power packs
- Auxiliary/Emergency generator sets for offshore wind converter platforms

We also offer customized offshore documentation according to project specific requirements.


Our system solutions for offshore wind and exploration & production



Engine plus system



Modularized generator drive
(Engine mounted on a large frame—customer provides Geno)



Standardized generator set

Systems solutions

CONTROLLING THE POWER WITH **mtu** NAUTIQ SOLUTIONS


Our engines are powerful and technologically advanced. But in order to offer the best efficiency, reliability, safety, and environmental compatibility, they need more than just power. They need intelligent electronic management. Modern engine management systems handle the control and monitoring of the hardware and enable perfect performance. Our ship automation systems **mtu** NautIQ are designed to offer the ideal combination of performance and precision individually for your applications from a wide range of solutions.

Naval

Through years of partnership with navies worldwide, we have developed unique expertise and unparalleled focus on the expectations and needs of modern fleets. We provide customers with customized and complete propulsion, automation and intelligent control systems tailored to the sensitive marine sector.

Commercial Marine

The decision for our ship automation solutions is a decision for state-of-the-art reliability and individual, dedicated customer service. Our systems sail aboard cargo ships, barges, crew ships, ferries and many other types of vessels worldwide, and our experience has made us an indispensable partner to commercial shipping on the world's oceans.

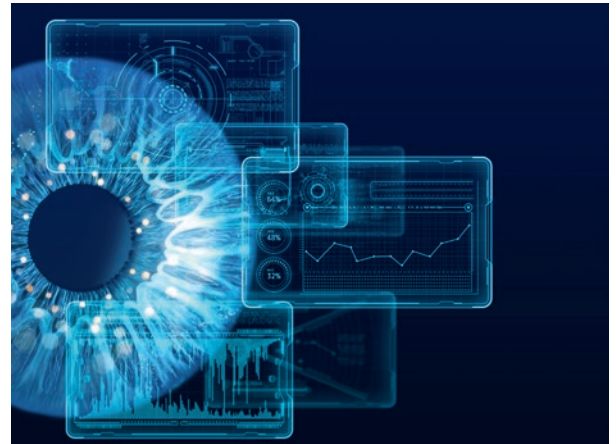

Yachts

High standards of quality, innovation and maximum flexibility are the basis of our portfolio of solutions for megayachts. Our customized automation systems, developed with passion by our team of long-standing experts, ensure unprecedented reliability on board yachts large and small. Globally, we can support customers through strong partnerships in design, technical feasibility and comprehensive maintenance, while the custom-fit solutions of our **mtu** NautIQ suite answer the demands and challenges of modern yacht operations.



You want to know more
about **mtu** NautIQ?
Scan the QR code or
talk to our experts.

Systems solutions

mtu NAUTIQ PORTFOLIO

THE FUTURE OF MARINE CONTROL

PERFORMANCE & EQUIPMENT HEALTH MANAGEMENT

mtu Go

Track, analyze and improve your yacht operations.

mtu NautIQ Foresight

Our fleet & engine health management system allows you to monitor and have real-time awareness of the technical condition of your vessel from bridge to propeller.

The system maximizes the availability of your vessel, and you can even use it to monitor your whole fleet.

With **mtu NautIQ Foresight** you can collect and analyze data from **mtu** systems and key third party components on the vessel, considering additional factors such as navigational data.

POWER AND PROPULSION CONTROL & MONITORING SOLUTIONS

mtu NautIQ Drive

NautIQ Drive systems offer precise control and monitoring for **mtu** propulsion plants. The modular scope of supply offers a selection of local operating panels, compact displays, touchscreen monitors, and propulsion control solutions, in classified or nonclassified configurations. **mtu NautIQ Drive** can also be interfaced to 3rd party systems, or seamlessly integrated with **mtu NautIQ** vessel automation or integrated bridge systems.

mtu NautIQ ePower

Our genset automation solutions are used to operate, control and monitor on-board power generation on ships. Our latest development combines modern, cost-efficient design (COTS) with future-proven technology meeting cyber security requirements.

VESSEL AUTOMATION AND INTEGRATED BRIDGE

mtu NautIQ Master Unlimited

As an Integrated Platform Management System (IPMS), **mtu NautIQ Master Unlimited** offers optimal solutions for complex vessels requiring highly flexible, redundant, and integrated solutions.

mtu NautIQ Master Advanced

This Alarm, Monitoring and Control System (AMCS) is an entry-level system that offers a reliable and highly cost-effective solution, designed using pre-engineered building blocks and specifically created to deliver COTS (Commercial Off-The-Shelf) solutions for all Marine sectors.

mtu NautIQ Master Essential

This Alarm, Monitoring and Control System (AMCS) is a proven, cost-effective solution designed for yachts and other vessels with straightforward automation requirements. Its compact, modular architecture provides reliable alarm handling, monitoring and essential control functions, while allowing easy integration and future system expansion.

mtu NautIQ Bridge

The navigation equipment and all the subsystems necessary to monitor and control the entire vessel can be seamlessly integrated on one platform. There is no need to modify third-party equipment or subsystems integrated into **mtu NautIQ Bridge**.

Systems solutions

mtu NAUTIQ MASTER UNLIMITED

mtu NautIQ Master Unlimited is an Integrated Platform Management System (IPMS) and offers the optimal solutions to meet a wide range of requirements for all types and sizes of vessels. Typically used on complex commercial projects.



Multiple operator workstations



Integratable Propulsion Control System (PCS)



Damage Control System (DCS)



**Multi-level redundant networking
including fibre optics**



Integratable Power Management System (PMS)



Dynamic Trend Analysis



Distributed Data Processing



Onboard Training Systems (OBTS)

mtu NautIQ Master Unlimited sub-systems and plug in modules:

- Navigation Bridge System
- Vessel Management System
- Communications
- Digital CCTV Surveillance
- Propulsion Control
- On Board Training System
- Power Management
- Condition Based Monitoring System
- Damage Control System

Systems solutions

mtu NAUTIQ MASTER ADVANCED

mtu NautIQ Master Advanced is an entry-level alarm, monitoring and control system (AMCS) that provides a reliable and highly cost-effective solution. Based on pre-engineered building blocks, the system offers built-in expansion capabilities to support future requirements. A range of display options is available to meet specific operational needs and console design requirements.

Key features:**Cost Efficient**

- Placing Remote Terminal Units (RTU) near the process reduces cabling
- Pre-engineered solution reduces engineering costs
- Self-diagnostic features help to improve maintenance scheduling

**Flexible**

- Option to interface with external systems
- Modular design allows for customisation
- Up to 50% expansion available within each RTU

**User-Friendly**

- Unified interface across devices
- Intuitive HMI
- Simple modular design

Systems solutions

mtu NAUTIQ MASTER ESSENTIAL

mtu NautIQ Master Essential is an Alarm, Monitoring and Control System (AMCS) providing a proven and cost-effective vessel automation solution for yachts and other vessels with straightforward automation requirements. Its modular architecture delivers reliable monitoring, alarm handling and essential control functions while allowing future system expansion.

Key features:

**User-Friendly**

- Enhanced and intuitive HMI for efficient vessel operation
- Clear alarm management with comprehensive system overview
- Easy operation and maintenance throughout the vessel lifecycle

**Flexible**


- Modular architecture tailored to individual vessel requirements
- Seamless integration with third-party equipment and unique feature for **mtu** systems deep monitoring
- Scalable platform supporting future upgrades and expansion

**Cost Efficient**

- Proven off-the-shelf automation solution
- Reduced engineering, installation and commissioning effort
- Lower lifecycle costs through reliable, easy-to-maintain system design

CURRENT WIND

PORT ENGINE

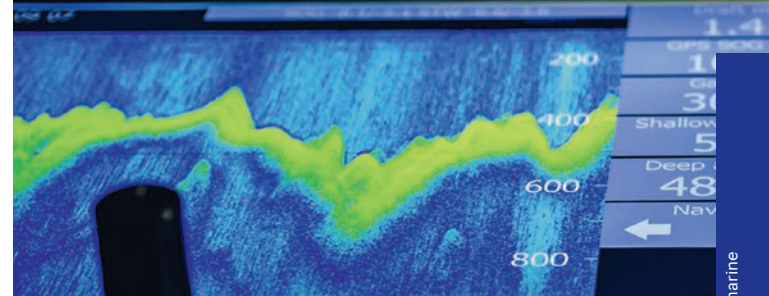



Systems solutions

mtu NAUTIQ BRIDGE ONE PLATFORM. ONE DESIGN. ONE SOURCE.

mtu NautIQ Bridge is a fully integrated bridge solution. This outstanding ensemble improves safety and offers a new level of customer experience.

One platform: Full integration

The navigation equipment and all the yacht subsystems necessary to monitor and control the entire vessel can be seamlessly integrated in one platform and controlled by a combination of touch screen displays and multicontrol devices. There is no need to modify third-party equipment or subsystems integrated into **mtu** NautIQ Bridge.

One design: Elegant, intuitive, user-optimized

All the information is presented in one elegant and user-optimized design.

- Total navigation control, simplified management
- Innovative design and functionality
- Safe and user-friendly thanks to consistent user interface
- Seamless user interface across all integrated subsystems

One source: Dependability for builders and owners

All the technology and services come from one source.

- One face to the customer for complete vessel operating system
- Global **mtu** service support, anytime, anywhere
- Seamless integration of product and technology
- Scalable, to integrate additional functions
- High flexibility for updates and upgrades

Systems solutions

mtu NAUTIQ FORESIGHT - FROM BRIDGE TO PROPELLER

Our Fleet & Engine Health Management System allows you to monitor and have full control over the technical condition of your vessel from bridge to propeller.

The system maximizes the availability of your vessel, and you can even use it to monitor a whole fleet. By providing system status at a click, **mtu** NautIQ Foresight makes availability management easier than ever before. It provides support for the maintenance and upkeep 24 hours a day, 7 days a week – and thus helps minimize vessel downtime.


With **mtu** NautIQ Foresight you can collect and analyze data from **mtu** systems and third-party key components on the vessel, considering additional factors, such as navigational data

Improved vessel availability

It's all about uptime. Real-time data analytics combined with artificial intelligence and machine learning techniques reduce unplanned downtime and maximize asset availability. The real-time sensor data on vibration, pressure, and temperature is compared with long-term figures for the respective operating conditions and ideal characteristic curves. The results enable optimum operation.

Peaked performance

Monitoring fuel oil consumption and measuring torque is the first step to understanding the state of the vessel. This information, combined with the health monitoring data, allows you to analyze and improve the vessel's performance. Weather and navigational data let you draw conclusions about factors such as hull condition. Additionally, the optimal speed can be determined. This performance monitoring system enables fuel cost optimization and contributes to reduced emissions.

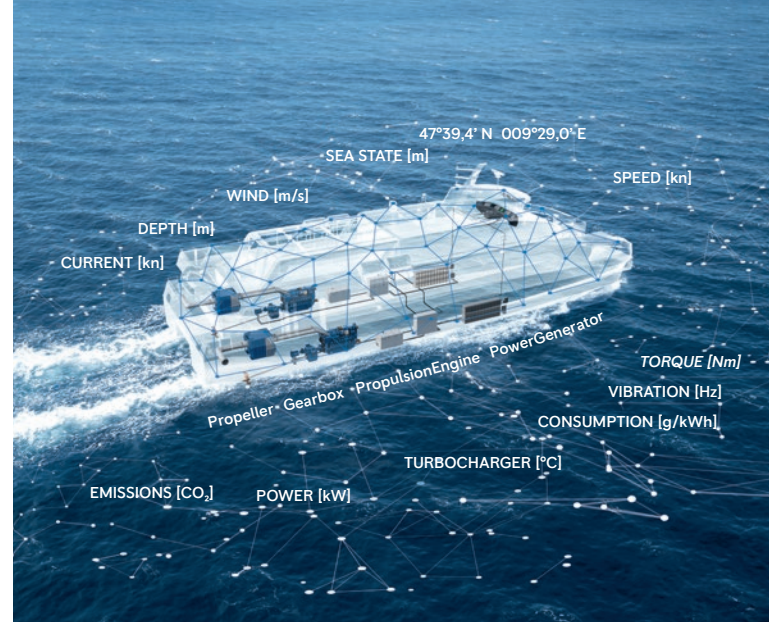

Optimized life cycle costs

Maximized availability and peaked performance optimize life cycle costs. Due to the improved plannability, downtimes are reduced to a minimum and unplanned maintenance is turned into planned maintenance.

Reduced emissions

mtu NautIQ Foresight bundles all operational data in one system. The combination of engine, power generation, navigational and weather data enable in-depth analytics of the vessel's movement and its performance. In the next step, the operation of the vessel can be adjusted to run in a more efficient and environment-friendly manner.

Systems solutions

STANDARDIZED PROPULSION
AUTOMATION SYSTEMS**mtu** NAUTIQ DRIVEfor **mtu** Series 2000 and 4000

For decades, we have been offering sophisticated standard automation systems to control, regulate and monitor the propulsion system - always doing a perfect job! Our current standard automation solution **mtu** NautIQ Drive is more convenient than ever before: easy to customize, easy to integrate, easy to operate.

mtu NautIQ Drive is available in multiple versions to meeting different requirements according to boat design and customer budgets:

- straightforward non-classifiable version

mtu NautIQ Drive Essential

- cost effective classifiable version

mtu NautIQ Drive Advanced



- enhanced classifiable version

mtu NautIQ Drive Unlimited

The modular system design allows a flexible configuration; intelligent data bus technology ensures reliable data exchange and reduces cable efforts. Optimized interfaces between the propulsion and automation systems result in ideal total solutions that guarantee you security, efficiency and reliability.

With **mtu** NautIQ Drive we offer you a complete and convenient system solution individually optimized for your ship, as well as comprehensive service – all from one source.

Thanks to “plug & play”, the system is as easily installed as it is operated.

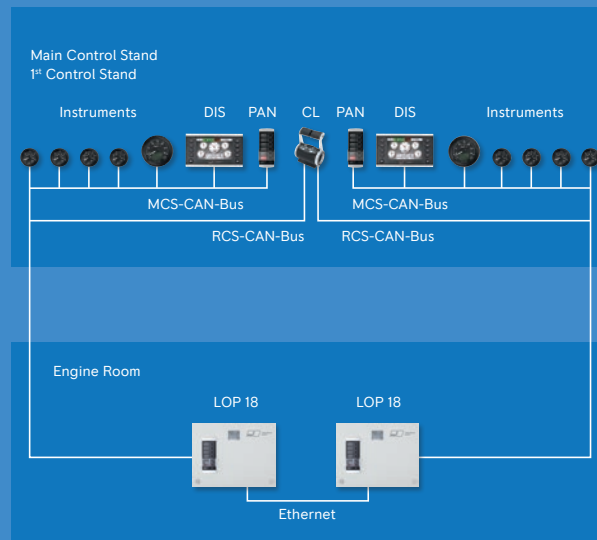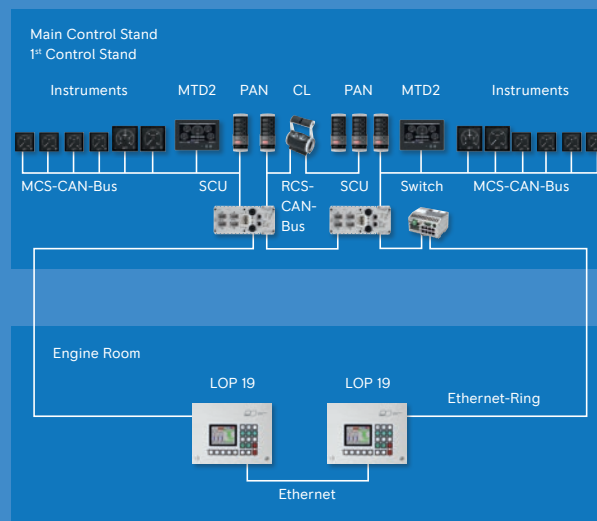mtu NautIQ Drive Essential**mtu** NautIQ Drive Advanced

Systems solutions

STANDARDIZED PROPULSION AUTOMATION SYSTEMS

mtu NAUTIQ DRIVE

Simple interfaces connect the monitoring & control system **mtu** NautIQ Drive with the **mtu** diesel engine and the gearbox.

All components are type-approved und type-examination tested in shake/vibration/stress tests.

Customer benefits

mtu NautIQ Drive is an automation system for propulsion plants in yachts and workboats with **mtu** Series 2000 or 4000 engines.


mtu NautIQ Drive offers the following benefits:

- High operational availability and reliability of the propulsion plant
- High flexibility thanks to modular system structure and open architecture
- Classifiable system in line with current directives
- Quicker and easier commissioning via structured user dialogue
- Type-tested components
- Development in accordance with current standards
- Optimized operation and visualization of the propulsion plant
- Uniform spare part concept across all **mtu** Series
- Global sales and service network
- Self-learning “Improved Crash-Stop” in order to stop the ship as quickly as possible

Additional

- Available in different versions with a choice of HMI interfaces such as small touch displays but also comprehensive operator stations (with **mtu** NautIQ Drive Unlimited).

mtu NautIQ Drive Unlimited

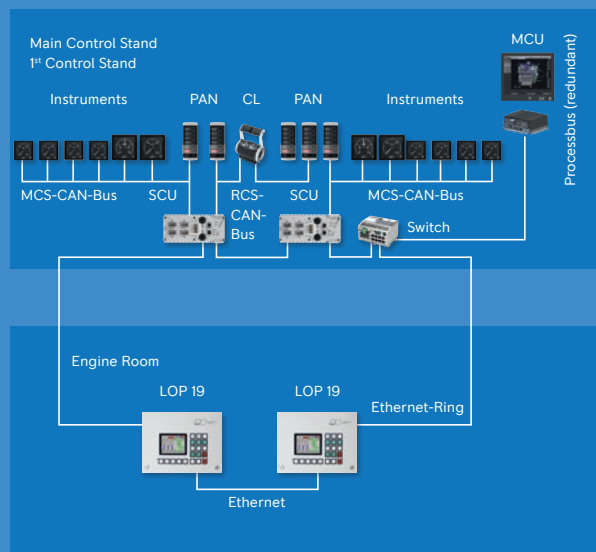

MTD2 (Multi Touch Display
2. Generation)




LOP 19 (Local Operating
Panel)

Systems solutions


mtu NAUTIQ EPOWER STANDARDIZED AND SYSTEM SOLUTION

mtu NautIQ ePower is an automation system for onboard power generation plants, offered in both classified and non-classified configurations. The modular system design enables optimal matching of the diesel engine and generator to diverse onboard operating conditions. It is designed for **mtu** Series 4000 engines.


mtu NautIQ ePower offers the following applications



On-board service power
non-classified and classified



Diesel-electric propulsion plant
non-classified and classified




Special applications

- MIL
- Shock
- EMC etc.

mtu NautIQ ePower automation system is an innovative high-end developed system with LOP (Local Operating Panel).

Customer interfaces

Interfaces	I/O signals	Power supply	Power supply
MODBus TCP	(hardwired)	main and	230 - 440 VAC
Security Protocol	for monitoring and control	emergency (redundant)	(50/60 Hz)
		24 VDC	

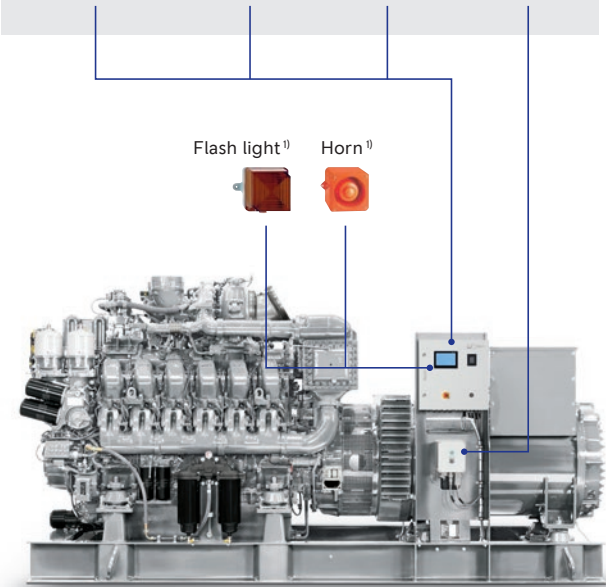

1) Optional features

mtu Augmented Reality technology

ENABLING SECURE AND RELIABLE NAVAL OPERATIONS IN A CHALLENGING ENVIRONMENT

Operators of naval vessels are faced with an ever-growing number of challenges: Vessels have to fulfil more demanding missions, staying at sea longer with smaller crews. At the same time, advancements in propulsion and energy conversion technologies also mean growing complexity of these systems. Our **mtu** AR technology could help to solve these challenges in the future.

It serves several purposes:

- Improving the understanding of system's functionalities
- Structured visual guidance for on-board maintenance tasks
- Enabling self-help (without the need for longstanding experience)
- Increasing safety on board

It does so by providing:

- Up-to-date and reliable information and documentation about the propulsion and energy conversion system anytime, anywhere
- Visual explanation of engine functions, e. g. of fluid systems
- Detailed step-by-step instructions for maintenance and repair
- Integrated guide for locating engine components

The **mtu** AR technology functions as a kind of “portable experienced engineer”: It can illustrate system functionalities through a combination of text, animations and videos in a very clear and easily understandable way and aid the operator with the same guidance for maintenance and repair tasks as during training courses in our factory training centre. Unlike in a printed repair manual, the AR system projects information onto the real hardware, showing on the spot what steps have to be done how, using which parts and tools.

All information for the **mtu** AR technology is stored on the device and does not require any cloud connection. It can be used with different standard COTS hardware:

- Via head-mounted device:
The virtual content (e. g. maintenance instructions) is projected via the glasses and added as an additional layer into the the user's normal view of reality
- Via mobile device (tablet or mobile phone):
The camera shows a live view of reality, virtual content is laid over the live view shown on the display



Guidance to locate components on the system



Virtual instructions on the actual hardware

Safety is good. Redundancy is better.

REDUNDANT CONTROLLER FOR FIRE PUMP DRIVE SYSTEMS (NFPA 20)

The NFPA-20 standard requires redundant engine controllers on fire-pump drive systems in order to prevent interruptions in the fire-pump water jet during an emergency. We are the first manufacturer in the world to offer redundant controllers for engines with common rail injection.

In accordance with this standard, the second controller must be installed on the engine and permanently wired. In the event of a fault on the first (main) controller, the second (backup) controller must take over the engine control automatically without interrupting the water jet. This measure increases the availability of your fire pumps and consequently the entire system.



The redundant controllers developed by us can be used in direct, hydraulic, and diesel-electric drive systems. To redundantly record all engine data required for controlling, a second sensor set is installed on the engine. The ECU7 engine control unit is used as a main and backup controller. Because the injectors and high-pressure fuel control block are not installed redundantly, triggering of these actuators must be switchable between the two controllers: and so the new SBX1 switch box forms the heart of this system.

Switching

The **mtu** engine controller offers the option of manual switching, whereby the controller active at any given moment is displayed optically (via LED). The switching process is designed to guarantee the greatest possible redundancy of the system. Optimal use is made of the ECU7 plugs for logic switching and for supplying the new unit. This results in extremely simple wiring. If switching is necessary, drops in speed and excessively high rail pressure must be prevented. Our system guarantees that these demands are met for all types of applications (direct, diesel-electric, or diesel-hydraulic pump drive), all engine cylinder variants (12V, 16V, or 20V), and for every engine base speed (1500 rpm for 4000 P63 or 1800 rpm for 4000 P83).

Benefits:

- Achieving the NFPA20 standard for **mtu** Series 4000 P-engines
- Specifically designed for common rail injection
- Increased availability thanks to redundancy
- Simple retrofitting due to plug-and-play
- All components are developed to work together seamlessly
- All from one trusted source and in the quality you expect from us

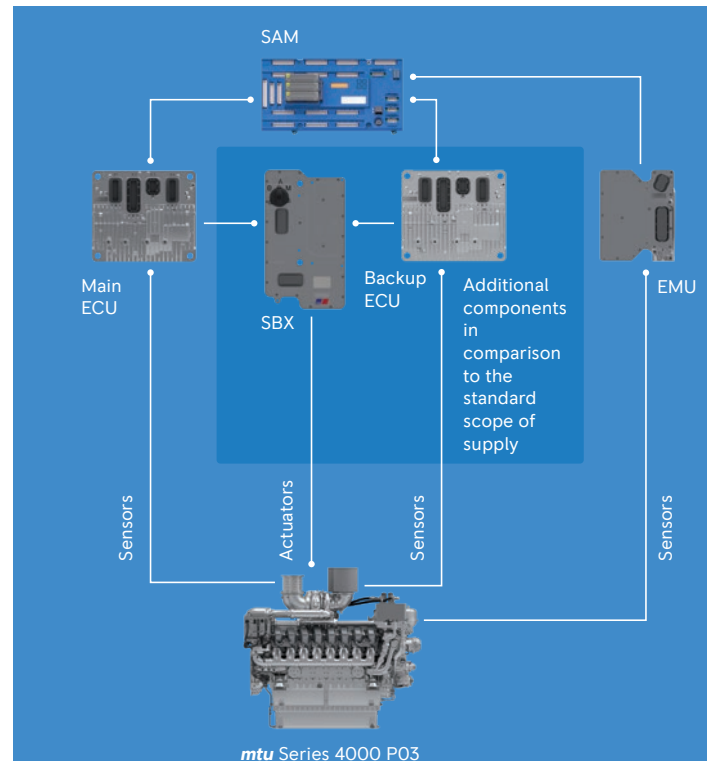

mtu Service solutions

mtu SERVICE SOLUTIONS – A LIFETIME OF VALUE

Our service solutions for engines and propulsion systems are designed to maximize performance, extend life, and provide expert support. These solutions are categorized into three main value propositions: **Secure, Sustain, and Support.**




Enjoy peace of mind with maximizing asset performance and reducing operational risks

- Extended coverage
- *mtu* ValueCare Agreements
- Digital solutions



Extending equipment life and reducing costs while protecting the environment

- Reman/overhaul solutions
- New exchange engine
- Upgrades and refits

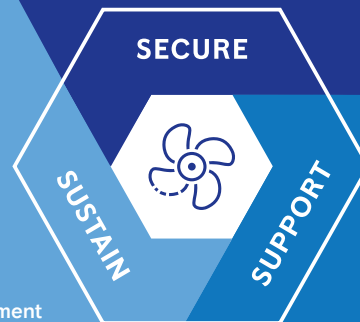

Expert service from a reliable partner to keep operations running smoothly


- Maintenance & repair
- Genuine spare parts & consumables
- Training
- Support services

Extended coverage

BEST-IN-CLASS
WARRANTY OPTIONS

Overview of scope and options:

Agreement duration and scope

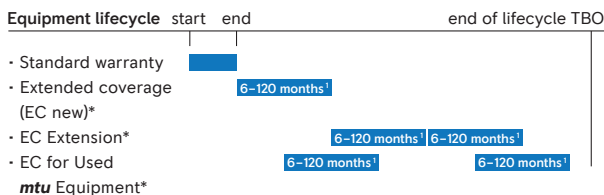Costs covered²

In case of a corrective claim:

- Material
- Labor and
- Travel cost (if applicable)

Covered equipment

Engine or entire system
Optional:
Exhaust aftertreatment,
Gearbox, Automation etc.
(only RRS scope of supply)

Place of performance

4 Options³ available,
usually "Worldwide"
at the next harbor to an
authorized **mtu** service
partner

Deductible

Customer can choose
between no deductible or
750 EUR/USD per product
per repair visit, to reduce
the EC price

* See your EC Terms & Conditions for details

1 Maximum validity period limited by extended coverage end date /
EC operating hours / engine lifetime (TBO), whatever occurs first

2 Exclusions: Removal & reinstallation of engine, gearbox etc. and all
preventive maintenance

3 Place of Performance: Worldwide, USA/CAN, EU or up to three individual
countries are possible

BENEFITS

Protect yourself against unexpected costs
with **mtu** Extended Coverage



Protection

against unexpected repair costs
(corrective maintenance)



100 % genuine

Exclusive use of original and
mtu remanufactured parts



Discount

when ordering prev. maintenance
excl. from any **mtu** service center



Professional Repair

by **mtu**-certified technicians



Enhanced resale value

when coverage is transferred
to a new owner



Flexible packages

to suit your needs
(e.g. 1-10 years duration)

mtu ValueCare Agreements

FOCUS ON YOUR OPERATIONS LEAVE THE REST TO US

With **mtu** ValueCare Agreements, you gain a long-term service partnership designed to maximize uptime, reduce lifecycle costs, and ease the workload of your maintenance team.

Unexpected failures disrupt operations.


Unplanned maintenance increases pressure on budgets and personnel. ValueCare turns reactive service into a structured, proactive approach. Preventive maintenance, defined service intervals, and optional remote monitoring help detect issues early — before they impact performance.

With Bronze, Silver, and Gold tiers, you select the level of support that fits your operational profile and financial planning. Fixed pricing models provide transparency and cost control, while annual health checks and proactive recommendations ensure continuous system optimization.

Backed by our global **mtu** service network, ValueCare delivers stability, predictability, and measurable lifecycle value — so your team can focus on operations, not service coordination.

Benefits:

- Predictable costs with fixed pricing models
- Proactive maintenance planning
- Reduced downtime and operational disruption
- Optimized lifecycle cost management
- Access to the global **mtu** service network

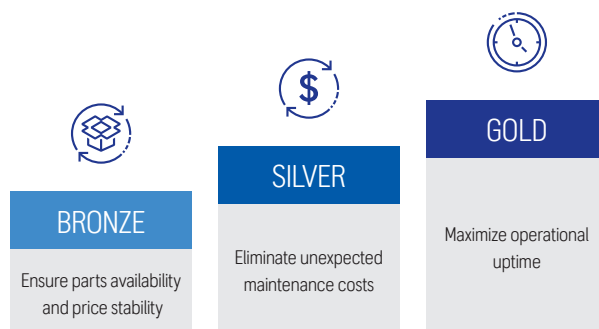

Digital solutions

YOUR POWER. YOUR SERVICE.
CONNECTED.

Digital Solutions connect your **mtu** systems to real-time performance intelligence — giving you full transparency across your assets and enabling smarter operational decisions.

With **mtu Go**, you monitor system performance remotely, receive early alerts, and gain actionable insights based on engineering expertise and global fleet data. Potential issues are identified before they become disruptions. As a digital enabler, these solutions strengthen your service strategy — enhancing preventive maintenance planning, supporting ValueCare agreements, and adding an additional layer of confidence to Extended Coverage.

Secure, scalable, and easy to integrate, Digital Solutions help you increase uptime, optimize efficiency, and maintain control — wherever you operate.

Benefits:

- Real-time performance visibility
- Early detection of potential issues
- Data-driven decision support
- Improved maintenance planning accuracy
- Increased operational transparency




mtu Go links your data with our engineering knowledge and experience from thousands of other assets in one global view to provide insights that enrich your business.


For details, please scan the QR Code or visit www.mtu-go.com



mtu Go

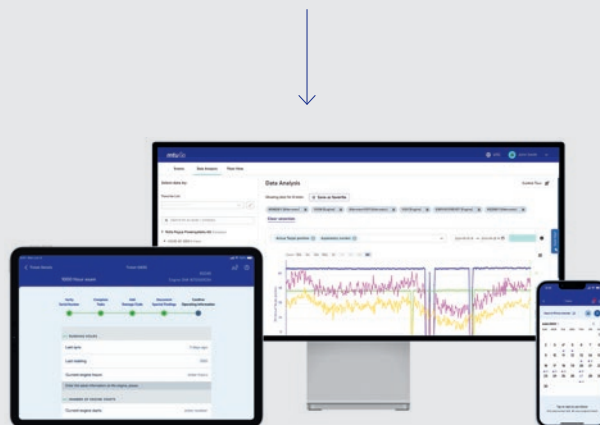

Digital solutions

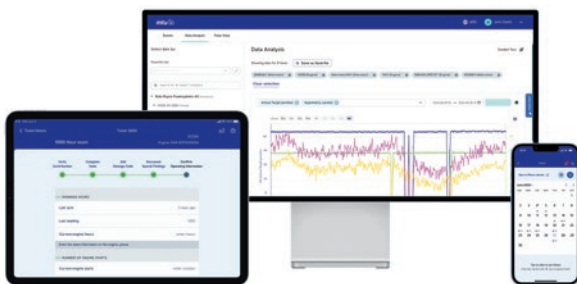YOUR POWER.
YOUR SERVICE.
CONNECTED.

Our cloud-based **mtu Go** portfolio aims to enhance your equipment performance through asset-related tools and services. For that, we have tailored packages suited to your needs.

**Connect all your equipment**

Data collection from your fleet, asset, system and engine

Connectivity is the basis for all the advantages of digitally supported service. Using our edge software connected to the control unit, you and your service network can monitor relevant deviations from the optimum conditions remotely. We offer several ways to collect data, including the creation of interfaces to already existing data sets. In doing so, we always adhere to the highest data privacy and security standards of our industry.

Access your data

- Remote monitoring, available for individual assets, as well as complete fleets worldwide
- Data privacy and security to the highest industry standards

mtu Go

Delivering actionable insights through digital solutions

**Asset Management**

Access comprehensive real-time and recent performance data for all assets worldwide, conveniently from one centralized platform

With the **mtu Go** platform, predefined users, such as on-site technicians or managers, can view the system data and perform initial analyses by using diagnostic tools. By accessing the same information, your service network can provide fast support in handling alarms and planning necessary maintenance together with you.

Keep track of your data

- All important data and alarms available at a glance for efficient fleet monitoring
- Intuitive and clear design for easy operation
- Visual comparison of data using the diagnostic tools for initial analyses

**Equipment Health Management**

Digital solutions for your detailed data analysis on necessary actions

Supported by **mtu Go** your Service Network is able to analyze all relevant data from your equipment and compare it with data sets from other systems. From this we together can proactively derive recommendations for action.

Enhance operational continuity and prevent equipment failure by leveraging proactive monitoring services. Utilize analytics to identify critical states and trends, ensuring optimal availability.

Packages coming soon (under development)

- Maintenance Management: Forecast, plan, and execute service tasks based on maintenance schedules and operating hours
- Guided Troubleshooting: providing a user-friendly and guided fault resolving experience for your technicians

Reman/overhaul solutions

WHATEVER YOUR CIRCUMSTANCE — WE'VE GOT YOU COVERED



mtu engines are built to last thanks to high engineering standards and an unwavering commitment to service and support. At the end of its first service life, we also offer solutions to refurbish your engine to like-new factory condition.



Provided by the same experts that originally built your engine, **mtu** reman and overhaul solutions make it run like new again. How? By delivering the same high standards of performance, service life and quality as with new **mtu** products. What's more, we offer fixed pricing and turnaround times up front along with a full factory warranty. Choose your solution from a wide reman and overhaul portfolio:

In-situ overhaul

Performed inside the ship

Condition based in-situ overhaul

Engine overhaul based on your engine's condition performed inside the ship.

Standard in-situ overhaul

A full overhaul of your engine performed inside the ship.

Factory overhauls

A full overhaul of your engine performed inside an **mtu** workshop.

Reman engine

Replace your existing engine and system with a remanufactured unit.

New exchange engine

A new engine from our series production.

Reman/overhaul solutions

KEEP A GOOD THING
GOING**Turn back the clock with factory overhauls**


Completely restore your original equipment with an overhaul in our factory. This solution is ideal for classic and specialized engines such as **mtu** Series 183, 396, 493, 538, 595, 652, 956, 1163 and others (e.g. 2000 and 4000) that require greater customization during the restoration and validation process. As a result, your equipment delivers same-as-new performance that only we can offer.

Save time and money with in-situ overhauls


Our in-situ overhauls directly inside the ship are ideal when the engine can't be removed from the vessel. We offer both comprehensive standard overhauls and a more cost-optimized, condition-based solution.

mtu standard in-situ overhaul

This comprehensive offer covers the replacement, overhaul and/or reconditioning of all engine components. The work performed fully complies with overhaul manual and maintenance specifications. The engine's service life is extended by a full cycle before the next scheduled overhaul.

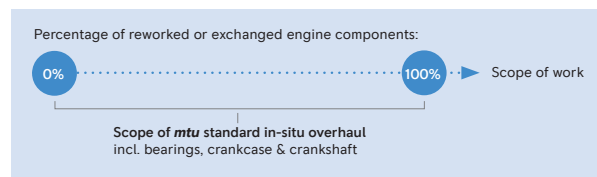**mtu condition-based in-situ overhaul**

With this more basic in-situ offer, replacement and overhaul of a defined scope of parts and components is mandatory. A list of other parts and components are also examined to determine whether to overhaul, exchange or continue using them. This option can potentially reduce the work scope, downtime and costs.

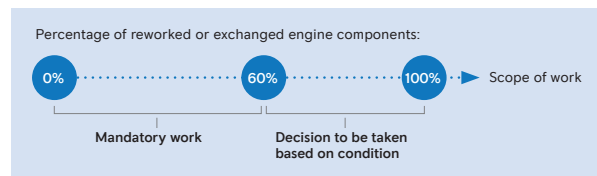**Exchange and save with a **mtu** reman solution**

To reduce downtime, many **mtu** engines can simply be exchanged for a factory remanufactured unit – without waiting. When you return your original core, we give you credit based on its technical condition. We even handle the total costs to replace it, thereby protecting you from any unforeseen costs. We also offer swing engines to keep your operation running if servicing requires engine removal. **mtu** reman is available for the **mtu** Series 2000 and 4000.





Support services

YOUR LOCAL SUPPORT — WORLDWIDE



The most important part of your propulsion system isn't a part at all — it's your local service team. With more than 1,200 service locations worldwide — backed by regional Parts Logistics Centers in Europe, Asia and America — you can count on responsive support by expert technicians, wherever work takes you. To find your local service partner, visit www.mtu-solutions.com.

Expert service from a reliable partner

On-Demand Support—including professional inspections and preventive maintenance recommendations from us—helps you identify and address problems early, save on repairs or unexpected downtime, and optimize your equipment's performance and longevity. Inspections include visual assessment, test run and leak check, on-site oil and coolant analysis, diagnostic evaluation and reporting.

Always on call, 24/7

Whether it's connecting you with a local service partner or assigning an urgent problem to a dedicated team of our experts, we're ready to assist you—wherever you are, whatever you need.

Europe, Middle East, Africa +49 7541 90-77777
Asia/Pacific +65 6860 9669
North and Latin America +1 248 560 8888

info@ps.rolls-royce.com



EXHAUST EMISSIONS

Many countries have implemented environmental legislation to protect people from consequences of polluted air. For this reason an increasing number of countries regulate emissions from specific mobile and stationary sources. Emission standards may apply internationally, nationally and/or for specific areas. The enforcement of an emission legislation may depend for example on the area where the equipment is used and the way it is operated.

The emission legislations may be categorized by power range and/or cylinder capacity. Emission legislations generally require a certificate which states compliance. Stationary applications may require on-site approvals (on-site emission test) depending on the particular emission legislation.

Please find as follows examples of emission standards which apply to the marine industry. For details please consult the applicable legislation and/or permitting authority.

IMO - International Maritime Organization

MARPOL Annex VI Regulation 13 (NOx) and NOx Technical Code 2008: Marine diesel engines > 130 kW for ships engaged on international voyages to which MARPOL Annex VI applies

(= flying the flag of a signatory, or entering waters of the jurisdiction of a signatory to the Annex. Signatory overview see IMO webpage, „Status of Conventions“). Fixed & floating platforms, including drilling rigs and similar structures, are considered as ships. For those structures IMO regulations are in addition to any controls imposed by the government which has jurisdiction over the waters in which they operate.

Applicability of tiers:

For new ships date of construction of the ship, for engine replacement with non-identical engine or installation of additional engine date of installation. Exemption rules are in place.

Currently applicable emission stages:

- IMO Tier II outside of NOx Emission Control Areas (NOx ECA)
- IMO Tier III is applicable in NOx Emission Control Areas (NOx ECA) only

Emission Control Areas (ECA):

- An ECA may limit NOx, SOx and particulate matter (PM) emissions, or both. MARPOL Annex VI Regulation 14 (SOx and PM emission compliance) requires fuels with less than 1000 ppm (0.1 %) sulphur (since January 1st, 2015).
- The enforcement dates of an ECA will be specified for each ECA individually. For the North American & US Caribbean ECA this has been January 1st, 2016 with regard to NOx.
- Additionally to the North American & US Caribbean the North Sea and the Baltic Sea are established as ECA for SOx and PM as well as NOx emissions.

For IMO Tier III certified engines with SCR aftertreatment, we provide a NOx-conformity document, which is mandatory by IMO's 2017 SCR guidelines and the NOx technical code 2008.

EXHAUST EMISSIONS

US EPA - United States Environmental Protection Agency

40CFR1042: Marine diesel engines > 8 kW for vessels registered (flagged) in the United States.

Applicability of tiers:

Date of engine manufacture. Specific replacement engine rules are in place. Exemption rules are in place.

Currently applicable emission stages:

- < 600 kW EPA Tier 3
- > 600 kW EPA Tier 4
- Recreational engines: EPA Tier 3r

China - China Emission Regulation for Marine Engines (Stage I, II)

GB 15097-2016 defines the regulatory requirements of Stage I and II.

GD05-2018 adds some operational detailed rules by CCS.

Currently applicable emission stages:

- C2

EU - European Union: Commercial Marine

EU Regulation 2016/1628 has replaced the previously existing EU Nonroad Directives 97/68/EC amended by 2012/46/EC and the corresponding CCNR limits.

It defines, in addition to many other categories of off-highway engines, the requirements for engines used in inland waterway vessels.

EU V applies for engines which have been placed into the market after 01/2019 respectively 01/2020 for engines > 300 kW.

Due to BREXIT, a GBTA type approval, provisional or full, is applicable for UK market (inland marine) starting from 2023.

EU - European Union: Recreational Marine

EU Recreational Craft Directive (RCD) 2013/53/EU has replaced the previously existing 94/25/EC as amended by 2003/44/EC. It defines the requirements for propulsion engines for recreational crafts from 2.5 to 24 m hull length operating within EU territories.

Applicability of stages:

Date of placing the engine/boat into the market.

Exemption rules are in place.

Currently applicable emission stages:

- EU V
- RCD 2

Due to BREXIT, a UKCA marking, declaring conformity with UKs recreational craft standards is applicable for UK market starting from 2023.


Additional to afore mentioned emission regulations we are able to deliver engines also for regional emission standards such as BSO (Lake Constance) or SAV (Switzerland) on request.

Besides current emission standards we are able to deliver also replacement engines with outdated emission standards. Replacement engine rules need to be observed.


EXHAUST EMISSIONS

Samples for emission stages in marine industry:
IMO

IMO Seagoing ships

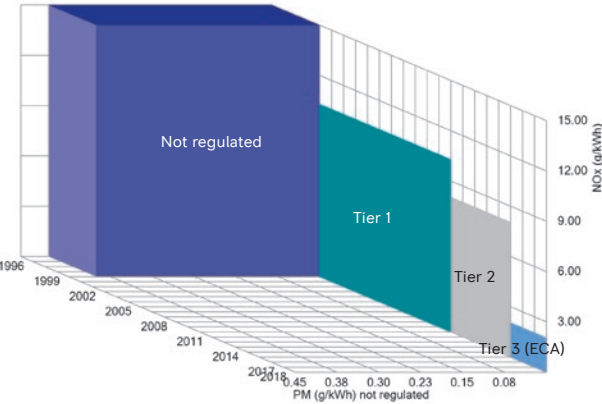

EPA

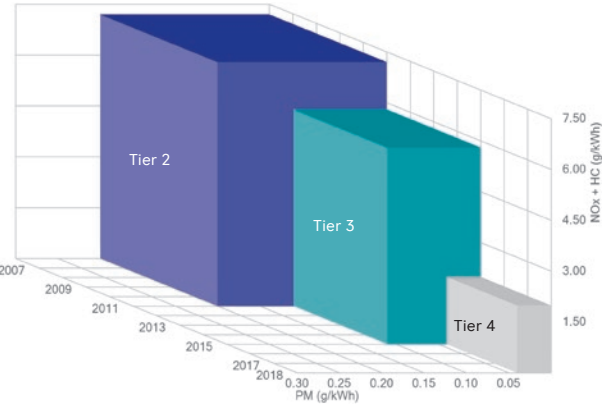

Abbreviations

- T3c EPA Tier 3 for commercial use
- T3r EPA Tier 3 solely for recreational use
- T4c EPA Tier 4 for commercial use
- T1NRMM EPA Tier 1 - Nonroad Mobile Machinery
- T2NRMM EPA Tier 2 - Nonroad Mobile Machinery
- CCNR II European commercial inland waterway transport - mutual recognition with EU IIIA
- EU IIIA European commercial inland waterway transport - mutual recognition with CCNR II
- RCD 2 European recreational craft directive
- EU V EU Tier V as per (EU) 2016/1628
- IMO I International Maritime Organization Stage I (beginning form January 2000)
- IMO II International emission standard outside of emission control areas (ECA)
- IMO III International emission standard within emission control areas (ECA)
- C1 China emission regulation for marine engines (Stage I)
- C2 China emission regulation for marine engines (Stage II)

Please note

that the engines and systems (only) comply with country or region specific emission requirements and have appropriate emission certification(s) which are explicitly stated in respective technic al specifications. Any Export/Import/ Operation of the engine in countries or regions with different applicable emission law requirements is at the customers responsibility.

NOTES

[illegible]This image shows a full page of blank, lined paper. It features approximately 28 horizontal blue or grey lines spaced evenly apart, typical of notebook paper. The lines extend across the entire width of the page, leaving small margins at the top and bottom. There are no vertical lines, text, or other markings on the page.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Further special solution guides

- Rail
- PowerGen
- C&I, Agricultural, Mining
- Oil & Gas Industry
- Gendrive

CONVERSION TABLE

1 kW	= 1.360 PS	g	= 9.80665 m/s ²
1 kW	= 1.341 bhp	л	= 3.14159
1 bhp	= 1.014 PS	e	= 2.71828
1 oz	= 28.35 g		
1 lb	= 453.59 g	1 lb	= 16 oz
1 short ton	= 907.18 kg	1 short ton	= 2000 lbs
1 lb/bhp	= 447.3 g/PS _h	1 ft lb	= 1.356 Nm
1 lb/bhp	= 608.3 g/kWh	1 ft/min	= 0.00508 m/s
1 gal/bhp (US)	= 4264 g/kWh	pDiesel	= 0.83 kg/l
1 kWh	= 860 kcal	1 lb/sqin	= 0.069 bar (1 psi)
1 cal	= 4.187 J	1 mm Hg	= 1.333 mbar (133.3 Pa)
1 BTU	= 1.055 kJ	1 mm H ₂ O	= 0.0981 mbar (9.81 Pa)
1 inch	= 2.540 cm	T (K)	= t (°C) + 273.15
1 sq. inch	= 6.542 cm ²	t (°C)	= 5/9 x (t (°F) -32)
1 cu. inch	= 16.387 cm ³	t (°C)	= 5/4 x t (°R)
1 foot	= 3.048 dm	1 foot	= 12 inches
1 sq. foot	= 9.290 dm ²	1 yard	= 3 feet
1 mile	= 1.609 km	1 mile	= 5280 feet
1 naut. mile	= 1.853 km	1 naut. mile	= 6080 feet
1 UK Gallon	= 4.546 l	1 US Barrel	= 0.159 m ³
1 US Gallon	= 3.785 l		= 42 US Gallons
Energy:	1 J = 1 Ws = 1 VAs = 1 Nm		
Power:	1 W = 1 VA = 1 Nm/s		
Force:	1 N = 1 kgm/s ²		
Pressure:	1 Pa = 1 N/m ² (1 bar = 10 ⁵ Pa)		
MEP (bar)	$= \frac{P_{cyl}(kW) \times 1200}{n(l/min) \times V_{cyl}(l)}$		
Torque (Nm)	$= \frac{P_{ges}(kW) \times 30000}{n(l/min) \times \pi}$		



Rolls-Royce Group
www.mtu-solutions.com

The Rolls-Royce name, Rolls-Royce Badge and Rolls-Royce Monogram logos are registered trade marks of Rolls-Royce plc